



大秦集團
DAQINJITUAN

电缆桥架系列

CABLE BRIDGE SERIES

镇江市亚东通用电气有限公司
ZHENJIANG YADONG GENERAL ELECTRIC CO., LTD.



» 公司简介

镇江市亚东通用电气有限公司是江苏大秦集团核心子公司。公司成立于1994年6月，现位于国家级经济开发区镇江新区金港大道82号，占地面积13万平方米，建筑面积9万平方米，公司现有员工300余人，其中工程技术人员50余人。

经过多年的不懈努力和追求，公司已发展成集设计、制造、研发、安装、调试等一条龙服务的规模企业，“特级信用”和“重合同、守信誉”单位，AAA级资信企业。

公司生产、检测设备先进、齐全，技术力量雄厚，工艺科学；拥有各种大中型设备二百余台套及4条生产加工线；销售累计突破30亿元，实现利润累计突破2亿元。

公司产业结构合理，品种系列齐全，是现代建筑地面电气布线系统的专业成套工厂。企业严格按ISO9001标准运行质量管理体系，采用国内外先进标准生产的高低压成套开关设备、母线槽、电缆汇线桥架、阻燃、防腐、防火系列汇线桥架等系列电器产品倍受市场欢迎，为国内外两千余家大型工程配套，深得用户的赞誉和信赖。

公司全体员工恪守“视产品质量为生命；以技术创新为动力；靠管理改进促发展；顾客满意为宗旨”的质量方针，坚持以高领先、以优称雄、以诚取信的发展战略和服务宗旨，愿为广大用户提供优质的产品和服务！

镇江市亚东通用电气有限公司恭请您莅临指导！



目录 CONTENTS

业绩表

资质文件

电缆桥架系列

Zhenjiang Yadong General Electric Co., Ltd is core subsidiary company of Jiangsu Daqin Group. Founded in June 1994, the company is now located at #82 Jingang Street, Zhenjiang New District (a national economic development district), with floor area of 130,000m² and construction area of 90,000m². The company has about 300 employees, 50 of them are engineering technicians.

After years of efforts, the company has developed into a big enterprise integrating design, manufacturing, R&D, installation and debugging, a "super credit" and "contract honoring and promise-keeping" company, and an AAA credit enterprise.

The company features advanced and complete production and inspection equipment, strong technical force and scientific technology; it has over 200 large and medium sized equipment and 4 production lines; sales amount exceeds 3 billion yuan and profit exceeds 200 million yuan.

With reasonable industry structure and complete product types, the company is a professional complete factory of modern construction floor electricity wiring system. The company has operated quality management system by ISO9001 standard and produce high and low voltage complete switch gear, bus duct, cable duct bridge, flame resistant, corrosion resistant and fire proof duct bridge by advanced production standard at home and abroad. Such electric devices are well received by the market, support over 2000 large scale projects at home and abroad and be praised and trusted by users.

The company staff abide by the principle of "product quality first; powered by technical innovation; developed by management improvement; customer satisfaction priority", insist on development strategy and service mission of "advancement, high quality and integrity", and provide users with high quality products and service!

Welcome to visit Zhenjiang Yadong General Electric Co., Ltd!



公司业绩表

序号	用 户 名 称	序号	用 户 名 称
1	北京市首都国际机场	28	南京钢铁集团公司
2	国家奥体中心	29	武汉钢铁集团公司
3	北京市电视台	30	安徽马鞍山钢铁公司
4	北京市地铁交通轨道线	31	唐山钢铁股份有限公司
5	北京市中关村科技大厦	32	中国铝业股份有限公司
6	北京首都钢铁公司	33	中国长江三峡水电枢纽
7	北京西客站	34	黄河小浪底水电枢纽
8	北京供电局	35	秦山核电站
9	北京华北电管局	36	华电黄石电厂
10	北京科技园置业股份有限公司	37	中电投上海漕泾电厂
11	北京地铁十号线	38	哈尔滨哈飞汽车制造有限公司
12	北京城建集团轨道交通路网管理服务	39	长春第一汽车制造厂
13	北京科技园置业股份有限公司	40	西安咸阳国际机场
14	北京建工集团有限责任公司	41	南京禄口国际机场
15	北京燕山石化	42	哈尔滨飞机制造公司
16	中央人民广播电台	43	南京地铁
17	北京日报社	44	广东省交通指挥中心
18	首钢京唐钢铁联合有限责任公司	45	山东济南海关
19	北京五洲大酒店	46	乌鲁木齐市公安局
20	北京解放军总医院	47	湖南省高级人民法院
21	中国国家体育场(鸟巢)	48	惠生(南京)化工有限公司
22	中国科技大学	49	上海东方明珠
23	北京博奇科技有限公司华能嘉祥电厂	50	天津远洋宾馆
24	北京博奇科技有限公司淮阴电厂	51	石家庄东方热电公司
25	南京航空航天大学	52	山西太原火车站
26	秦皇岛奥体中心	53	福州国际广场
27	上海宝钢集团	54	湖北中南设计院大厦



公司业绩表

序号	用 户 名 称	序号	用 户 名 称
55	江西供电局	82	云南玉溪卷烟厂
56	上海市安装工程有限公司	83	广西玉柴动力机厂
57	上海化工设计院	84	四川大学
58	上海世贸大厦	85	四川工商银行
59	上海自来水市北有限公司	86	四川绵阳污水处理厂
60	上海胜标(世博村)	87	四川宜宾五粮液酒厂
61	上海虹桥机场	88	中国石化宁波工程有限公司
62	上海建工总公司	89	中国第二十二冶金建设公司
63	上海宝冶建设有限公司	90	大唐三门峡发电有限责任公司
64	上海中福花苑二期工程	91	河北省电力建设第一工程公司物资公司
65	河南商丘电信局	92	江西丰城发电有限责任公司第二期工程
66	河南新郑卷烟厂	93	中建八局首都机场GTC项目总承包部
67	河南三门峡铝厂	94	湖南运达房地产开发有限公司
68	河南郑州上街热电厂	95	中国重型汽车集团有限公司
69	郑州大酒店	96	内蒙古自治区第三电力建设工程公司
70	山东青岛国际会展中心	97	中天建设集团有限公司第六建设公司
71	山东日照电厂	98	南阳防爆集团有限公司
72	烟台海关大楼	99	山西漳山发电有限责任公司
73	青岛89865部队	100	临沂桃源房地产开发有限公司
74	青岛兰石重型机械设备有限公司	101	华电(北京)热电有限公司
75	山东鲁能物资济南供电物资分公司	102	中国航空建设发展有限公司
76	青岛乐金浪潮数字通信有限公司	103	中国石油化工股份有限公司
77	齐鲁石化	104	中国人民解放军61975部队
78	沈阳金杯客车制造有限公司	105	中铁建设集团有限公司
79	大庆石油管理局	106	京能(赤峰)能源发展有限公司
80	新疆乌鲁木齐水电站	107	秦皇岛港城电力工程有限公司
81	中国铝业股份有限公司贵州分公司	108	杭州博奥成套电气有限公司



公司业绩表

序号	用 户 名 称	序号	用 户 名 称
109	江苏新海石化有限公司	136	成都飞机制造厂
110	海洋石油工程股份有限公司	137	河南森源电器有限公司
111	嘉兴东方钢帘有限公司	138	连云港港旗台30万吨级码头
112	宿松县人民医院	139	浙江开元安装集团有限公司
113	宜昌南玻硅材料有限公司	140	中国新兴建设开发总公司一公司
114	兖矿国乙酰泰化工有限公司	141	华电宁夏灵武发电有限公司
115	南京朗诗置业股份有限公司	142	华电莱发电有限公司
116	湖南辰溪清水塘水电站	143	华润电力贺州电厂
117	靖江行政中心筹建办公室	144	上海漕泾发电有限公司
118	无锡新三洲特钢有限公司	145	国电北仑港发电有限公司
119	中海石油炼化有限责任公司惠州炼油分公司	146	上海锅炉厂河南新密发电有限公司
120	中国浦发机械工业股份有限公司	147	上海锅炉厂江苏新海发电有限公司
121	辽宁锦华化工(集团)有限责任公司	148	上海锅炉厂华润电力湖北蒲圻电厂
122	济南鲁能电气集团有限公司	149	江苏电建三公司南京金陵发电厂
123	中国石油化工股份有限公司金陵分公司	150	内蒙古上都发电有限公司
124	武汉凯迪电力股份有限公司	151	内蒙古呼伦贝尔发电有限公司
125	清华同方环境有限责任公司	152	国电陈家港发电有限公司
126	安徽省人民检察院	153	辽宁抚顺石化有限公司
127	中国移动通信集团有限公司	154	中国石油化工股份有限公司
128	重庆长安汽车有限责任公司	155	山东齐鲁石化工程有限公司
129	徐工(重庆)工程机械有限公司	156	中国寰球有限公司辽宁公司
130	浙江萧山机场	157	中国天然气有限公司抚顺石化公司
131	华能太仓发电有限责任公司	158	中国石油东北炼化工程有限公司吉林设计院
132	中国人民解放军96531部队	159	河北华北石油工程建设公司
133	中国重型汽车集团泰安五岳专用汽车	160	中国天然气有限公司广西石化公司
134	中国化学工程第三建设公司巴斯夫项目	161	常州日新化学有限公司
135	济南舜华园建设发展有限公司	162	内蒙古大唐国际克什克腾煤制天然气有限责任公司



编号 321191000201705180012



营业执照

(副本)

统一社会信用代码 913211916088966423 (1/3)

名称 镇江市亚东通用电气有限公司

类型 有限责任公司

住所 镇江新区大港金港大道82号

法定代表人 王晨勇

注册资本 10080万元整

成立日期 1994年01月02日

营业期限 1994年01月02日至*****

经营范围 高低压配电柜、母线槽、汇线、不燃桥架、补偿器、金属管
件制造、加工、销售；交通安全标志、标识、标线的制作安
装；五金、电器、仪表、阀门、灯具、建材、化工燃料（不
含易燃易爆品）批发、零售；本公司生产的产品安装、调试
服务。（依法须经批准的项目，经相关部门批准后方可开展
经营活动）




登记机关



2017年 05月 16日



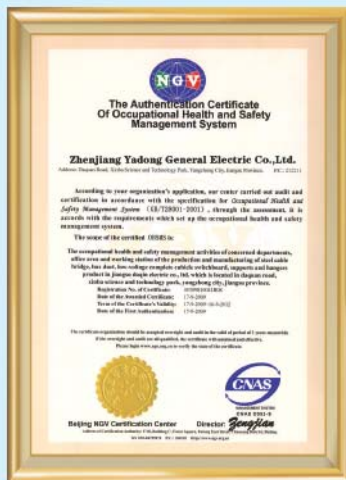



大勤集團
DAQINJITUAN






大跨距電纜匯線橋架

Cable for combination with large spans

XQJ-DJ

槽式、托盤式、梯級式載荷曲線
(A型)

Load diagram of Channel-type, tray-type and ladder-type
(A type)

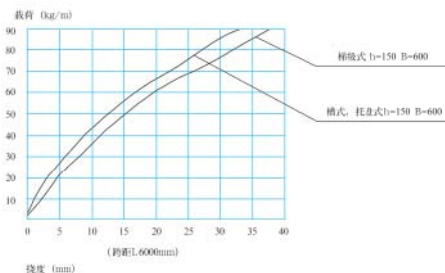


DJ大跨距電纜匯線橋架可分為梯級式、托盤式、槽式，分別用T、P、C表示。支撐間距 $<6\text{mm}$ ，當跨距 $>6\text{mm}$ 時可接受特殊定貨。


DJ Cables for combination with large spans can be divided into ladder-type, tray-type and channel type, which can be represented by T, P, C separately. When the supporting span is 6mm, you can receive special order.

槽式、托盤式、梯級式載荷曲線
(B型)

Load diagram of Channel-type, tray-type and ladder-type
(B type)

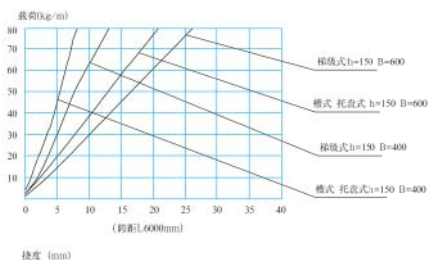


DJ型梯级式大跨距电缆桥架
Ladder Type Long Span Cable Tray Model DJ
(A型)

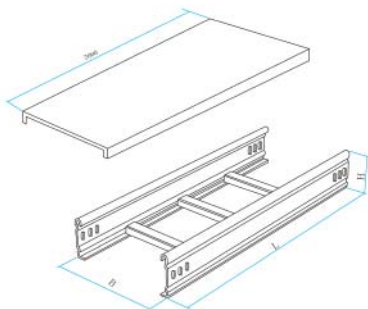

注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型号 Model	宽度 B	高度 H	重量kg/节 L=6000mm	护罩 Cover
DJ-C-A-6-2	200	60	38.60	8.69
DJ-C-A-6-3	300		40.04	14.60
DJ-C-A-6-4	400		41.5	23.60
DJ-C-A-6-5	500		51.92	26.84
DJ-C-A-6-6	600		53.40	38.17
DJ-C-A-10-2	200	100	52.33	8.69
DJ-C-A-10-3	300		53.63	14.60
DJ-C-A-10-4	400		62.33	23.60
DJ-C-A-10-5	500		63.75	26.84
DJ-C-A-10-6	600		65.21	38.17
DJ-C-A-15-2	200	150	76.28	8.69
DJ-C-A-15-3	300		78.08	14.60
DJ-C-A-15-4	400		79.38	23.60
DJ-C-A-15-5	500		91.44	26.84
DJ-C-A-15-6	600		92.92	38.17
DJ-C-A-20-2	200	200	96.14	8.69
DJ-C-A-20-3	300		97.43	14.60
DJ-C-A-20-4	400		98.73	23.60
DJ-C-A-20-5	500		100.04	26.84
DJ-C-A-20-6	600		101.34	38.17
DJ-C-A-20-8	800		104.00	50.55


DJ型梯级式大跨距电缆桥架
Ladder Type Long Span Cable Tray Model DJ
(B型)

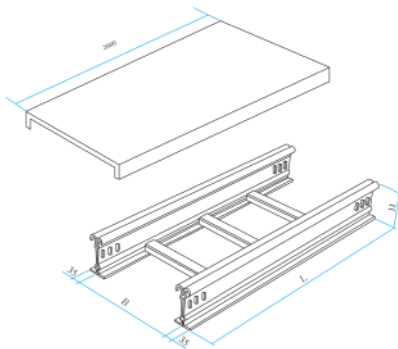

注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型号 Model	宽度 B	高度 H	重量kg/节 L=6000mm	护罩 Cover
DJ-C-B-6-2	200	60	74.30	10.20
DJ-C-B-6-3	300		69.44	16.10
DJ-C-B-6-4	400		70.90	25.10
DJ-C-B-6-5	500		81.32	28.40
DJ-C-B-6-6	600		82.80	29.70
DJ-C-B-10-2	200	100	98.81	10.20
DJ-C-B-10-3	300		100.11	16.10
DJ-C-B-10-4	400		108.81	25.10
DJ-C-B-10-5	500		110.23	28.40
DJ-C-B-10-6	600		111.69	29.70
DJ-C-B-15-2	200	150	146.08	10.20
DJ-C-B-15-3	300		147.38	16.10
DJ-C-B-15-4	400		148.68	25.10
DJ-C-B-15-5	500		160.74	28.40
DJ-C-B-15-6	600		162.22	29.70
DJ-C-B-20-2	200	200	183.5	10.20
DJ-C-B-20-3	300		184.79	16.10
DJ-C-B-20-4	400		186.09	25.10
DJ-C-B-20-5	500		187.40	28.40
DJ-C-B-20-6	600		188.70	29.70
DJ-C-B-20-8	800		191.36	51.60


DJ型托盘式大跨距电缆桥架
Tray Type Long Span Cable Tray Model DJ
(A型)

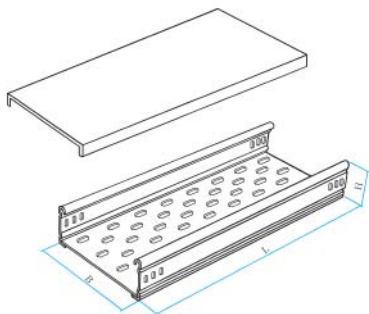

注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型号 Model	宽度 B	高度 H	重量kg/节 L=6000mm	护罩 Cover
DJ-P-A-6-2	200	60	67.33	8.69
DJ-P-A-6-3	300		83.74	14.60
DJ-P-A-6-4	400		115.77	23.60
DJ-P-A-6-5	500		135.80	26.84
DJ-P-A-6-6	600		155.80	38.17
DJ-P-A-10-2	200	100	88.47	8.69
DJ-P-A-10-3	300		104.48	14.60
DJ-P-A-10-4	400		136.51	23.60
DJ-P-A-10-5	500		156.54	26.84
DJ-P-A-10-6	600		176.55	38.17
DJ-P-A-15-2	200	150	116.18	8.69
DJ-P-A-15-3	300		132.19	14.60
DJ-P-A-15-4	400		164.22	23.60
DJ-P-A-15-5	500		184.25	26.84
DJ-P-A-15-6	600		204.26	38.17
DJ-P-A-20-2	200	200	138.11	8.69
DJ-P-A-20-3	300		154.12	14.60
DJ-P-A-20-4	400		186.15	23.60
DJ-P-A-20-5	500		206.18	26.84
DJ-P-A-20-6	600		226.19	38.17
DJ-P-A-20-8	800		266.22	50.55


DJ型托盘式大跨距电缆桥架
Tray Type Long Span Cable Tray Model DJ
(B型)



注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型号 Model	宽度 B	高度 H	重量kg/节 L=6000mm	护罩 Cover
DJ-P-B-6-2	200	60	103.43	10.20
DJ-P-B-6-3	300		119.44	16.10
DJ-P-B-6-4	400		151.47	25.10
DJ-P-B-6-5	500		171.50	28.40
DJ-P-B-6-6	600		191.50	29.70
DJ-P-B-10-2	200	100	144.91	10.20
DJ-P-B-10-3	300		160.92	16.20
DJ-P-B-10-4	400		192.95	25.10
DJ-P-B-10-5	500		212.98	28.40
DJ-P-B-10-6	600		232.99	29.70
DJ-P-B-15-2	200	150	200.33	10.20
DJ-P-B-15-3	300		216.34	16.10
DJ-P-B-15-4	400		248.37	25.10
DJ-P-B-15-5	500		268.40	28.40
DJ-P-B-15-6	600		288.41	29.70
DJ-P-B-20-2	200	200	244.19	10.20
DJ-P-B-20-3	300		264.20	16.10
DJ-P-B-20-4	400		292.23	25.10
DJ-P-B-20-5	500		312.26	28.40
DJ-P-B-20-6	600		332.27	29.70
DJ-P-B-20-8	800		372.30	51.60

DJ型槽式大跨距电缆桥架
Channel Type Long Span Cable Tray Model DJ
(A型)

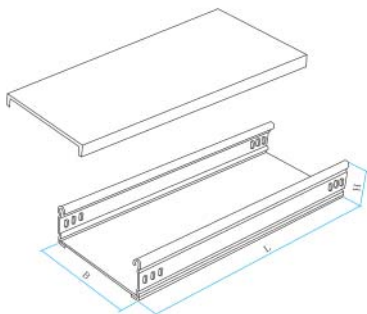


注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型号 Model	宽度 B	高度 H	重量kg/节 L=6000mm	护罩 Cover
DJ-C-A-6-2	200	60	67.33	8.69
DJ-C-A-6-3	300		83.74	14.60
DJ-C-A-6-4	400		115.77	23.60
DJ-C-A-6-5	500		135.80	26.84
DJ-C-A-6-6	600		155.80	38.17
DJ-C-A-10-2	200	100	88.47	8.69
DJ-C-A-10-3	300		104.48	14.60
DJ-C-A-10-4	400		136.51	23.60
DJ-C-A-10-5	500		156.54	26.84
DJ-C-A-10-6	600		176.55	38.17
DJ-C-A-15-2	200	150	116.18	8.69
DJ-C-A-15-3	300		132.19	14.60
DJ-C-A-15-4	400		164.22	23.60
DJ-C-A-15-5	500		184.25	26.84
DJ-C-A-15-6	600		204.26	38.17
DJ-C-A-20-2	200	200	138.11	8.69
DJ-C-A-20-3	300		154.12	14.60
DJ-C-A-20-4	400		186.15	23.60
DJ-C-A-20-5	500		206.18	26.84
DJ-C-A-20-6	600		226.19	38.17
DJ-C-A-20-8	800		266.22	50.55

DJ型槽式大跨距电缆桥架
Channel Type Long Span Cable Tray Model DJ
(B型)

注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

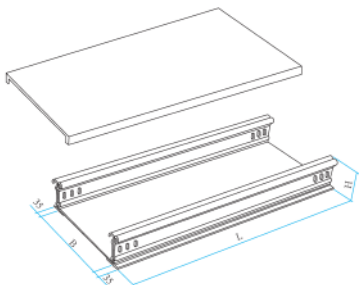

型号 Model	宽度 B	高度 H	重量kg/节 L=6000mm	护罩 Cover
DJ-C-B-6-2	200	60	103.43	10.20
DJ-C-B-6-3	300		119.44	16.10
DJ-C-B-6-4	400		151.47	25.10
DJ-C-B-6-5	500		171.50	28.40
DJ-C-B-6-6	600		191.50	29.70
DJ-C-B-10-2	200	100	144.91	10.20
DJ-C-B-10-3	300		160.92	16.10
DJ-C-B-10-4	400		192.95	25.10
DJ-C-B-10-5	500		212.98	28.40
DJ-C-B-10-6	600		232.99	29.70
DJ-C-B-15-2	200	150	200.33	10.20
DJ-C-B-15-3	300		216.34	16.10
DJ-C-B-15-4	400		248.37	25.10
DJ-C-B-15-5	500		268.40	28.40
DJ-C-B-15-6	600		288.41	29.70
DJ-C-B-20-2	200	200	244.19	10.20
DJ-C-B-20-3	300		260.20	16.10
DJ-C-B-20-4	400		292.23	25.10
DJ-C-B-20-5	500		312.26	28.40
DJ-C-B-20-6	600		332.27	29.70
DJ-C-B-20-8	800		372.30	51.60

槽式电缆桥架

Channel-Type Cable


XQJ-C

XQJ-C型槽式电缆桥架是一种全封闭型电缆桥架，它适用于敷设计算机电缆、通讯电缆、热电偶电缆及其它高灵敏系统的控制电缆等。它对控制电缆的屏蔽干扰和重腐蚀环境中电缆的防护都有较好的效果


XQJ-C type of channel-type cable is fully sealed. It is suitable for Laying computer cable, Communication cable, thermo-couple cable and control cable with other sensitive system. It has a good effect on the screen interference of control cable and the protection of cable in heavy corrosion environment.

槽式电缆桥架在不同跨距下最大允许均布载荷曲线图

The diagram of the maximumly-permitted uniform load of channel-type cable under different spans

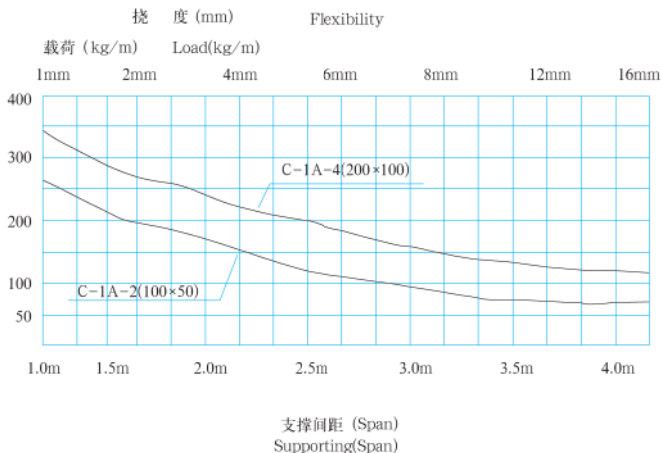


槽式扁形直通桥架 XQJ-C-01A
Channel Type Platoid Straight Cable Tray Model XQJ-C-01A

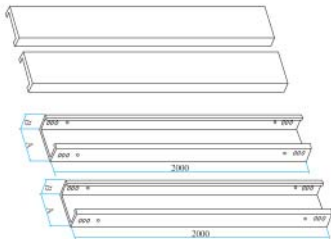

型 号 Model	规格A×B Specification	重量kg Weight	护 罩 Cover	备 注 Remark
C-1A-1	50×25	4.81	2.12	当H>125 时, 每端各 12只连接孔
C-1A-2	100×50	8.81	4	
C-1A-3	150×75	12.82	5.8	
C-1A-4	200×100	22.98	8.05	
C-1A-5	250×125	28.92	9.3	
C-1A-6	300×150	41.58	13.53	
C-1A-7	400×200	69.85	21.89	
C-1A-8	500×200	90.41	26.84	
C-1A-9	600×200	86.10	38.17	
C-1A-10	800×200	107.71	58.15	

注: 需配护罩时请注明, 配套扣锁价格另计。
Note: The price of locks is exclusive.


扁形直通桥架终端封头 XQJ-C-01B
Platoid Straight Cable Tray End Block Model XQJ-C-01B



型 号 Model	规格A×B Specification	重量kg Weight	备 注 Remark
C-1B-1	43×18	0.065	当B≥140 时, 连接孔 为双排孔
C-1B-2	93×43	0.182	
C-1B-3	143×68	0.351	
C-1B-4	190×90	0.689	
C-1B-5	240×115	1.0	
C-1B-6	290×140	1.37	
C-1B-7	387×187	2.76	
C-1B-8	487×187	3.24	
C-1B-9	587×187	3.72	
C-1B-10	787×187	4.68	

注: 需配护罩时请注明, 配套扣锁价格另计。
Note: The price of locks is exclusive.


扁形水平等径弯通 XQJ-C-2A
Platoid Horizontal Equant Elbow Joint Cable Tray Model XQJ-C-2A

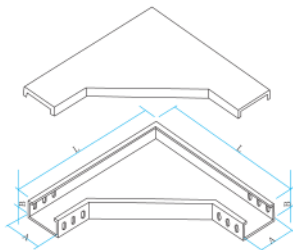

型 号 Model	规格A×B Specification	L	重量kg Weight	护 罩 Cover	备 注 Remark
C-2A-1	50×25	350	3.8	1.32	当H>125 时, 每端各 12只连接孔
C-2A-2	100×50	400	5.86	1.9	
C-2A-3	150×75	450	8.43	2.73	
C-2A-4	200×100	500	13.76	3.66	
C-2A-5	250×125	550	17.49	4.62	
C-2A-6	300×150	600	23.51	10.92	
C-2A-7	400×200	800	35.09	21.97	
C-2A-8	500×200	900	46.30	27.21	
C-2A-9	600×200	1000	61.00	32.29	
C-2A-10	800×200	1200	82.18	46.7	

注: 需配护罩时请注明, 配套扣锁价格另计。
Note: The price of locks is exclusive.

垂直等径上弯通 XQJ-C-2B
Vertical Equant Upper Elbow Cable Tray Model XQJ-C-2B

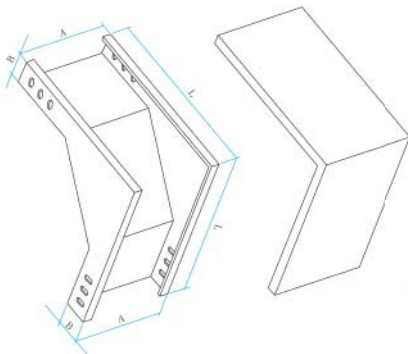


注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.

型 号 Model	规格A×B Specification	L	重量kg Weight	护 罩 Cover	备 注 Remark
C-2B-1	50×25	325	2.71	0.81	当H>125 时，每端各 12只连接孔
C-2B-2	100×50	350	4.92	1.65	
C-2B-3	150×75	375	6.32	2.52	
C-2B-4	200×100	400	11.67	3.95	
C-2B-5	250×125	425	13.88	4.35	
C-2B-6	300×150	450	18.35	5.59	
C-2B-7	400×200	600	31.77	11.05	
C-2B-8	500×200	600	36.13	13.65	
C-2B-9	600×200	600	40.28	16.12	
C-2B-10	800×200	600	51.69	21.26	

扁形水平等径下弯通 XQJ-C-2C
Vertical Equant Lower Elbow Joint Cable Tray Model XQJ-C-2C

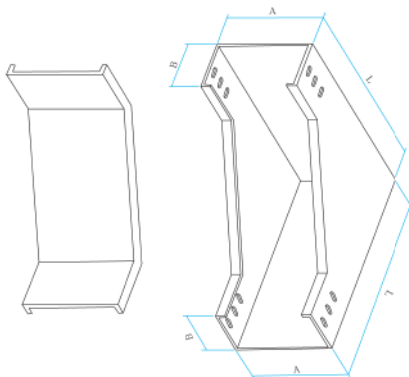

注：需配护罩时请注明，配套扣锁价格另计。


Note: The price of locks is exclusive.

型 号 Model	规格A×B Specification	L	重量kg Weight	护 罩 Cover	备 注 Remark
C-2C-1	50×25	325	2.52	0.66	当H>125 时，每端各 12只连接孔
C-2C-2	100×50	350	4.76	1.26	
C-2C-3	150×75	375	6.11	1.9	
C-2C-4	200×100	400	11.30	2.17	
C-2C-5	250×125	425	12.14	2.62	
C-2C-6	300×150	450	17.29	3.1	
C-2C-7	400×200	600	30.25	5.72	
C-2C-8	500×200	600	35.45	7.61	
C-2C-9	600×200	600	39.75	8.32	
C-2C-10	800×200	600	48.25	10.97	

垂直等径左下弯通 XQJ-C-2D


Vertical Equant Left Lower Elbow Joint Cable Tray Model XQJ-C-2D

注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.



垂直等径右下弯通 XQJ-C-2E


Vertical Equant Right Lower Elbow Joint Cable Tray Model XQJ-C-2E



规格 Specification			重量kg Weight	护罩 Cover	备注 Remark
A × B	L1	L2			
50 × 25	350	325	2.55	0.81	当H>125 时，每端各 12只连接孔
100 × 50	400	350	4.92	1.41	
150 × 75	450	375	7.38	1.99	
200 × 100	500	400	12.72	2.62	
250 × 125	550	425	16.43	3.23	
300 × 150	600	450	20.56	3.89	
400 × 200	800	500	43.75	8.9	
500 × 200	900	500	53.94	12.5	
600 × 200	1000	500	67.32	20.76	
800 × 200	1200	500	92.61	32.8	

垂直等径左上弯通 XQJ-C-2F


Vertical Equant Left Upper Elbow Joint Cable Tray Model XQJ-C-2F



注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.


垂直等径右上弯通 XQJ-C-2G

Vertical Equant Right Upper Elbow Joint Cable Tray Model XQJ-C-2G



规格 Specification			重量kg Weight	护罩 Cover	备注 Remark
A × B	L1	L2			
50 × 25	350	325	3.12	0.45	当H>125 时，每端各 12只连接孔
100 × 50	400	350	5.63	0.98	
150 × 75	450	375	8.5	1.58	
200 × 100	500	400	14.08	2.2	
250 × 125	550	425	18.68	2.95	
300 × 150	600	450	22.2	3.72	
400 × 200	800	500	45.4	8.5	
500 × 200	900	500	56.1	11.7	
600 × 200	1000	500	69.4	19.23	
800 × 200	1200	500	94.32	30.18	

扁形水平等径三通 XQJ-C-3A
Platoid Horizontal Equant T-joint Cable Tray

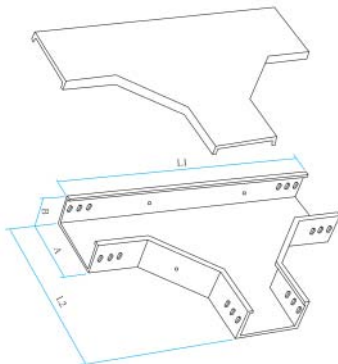


注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.

型号 Model	规格 Specification	重量kg Weight	护罩 Cover	备注 Remark
C-3A-1	50 × 25	650	350	5.75
C-3A-2	100 × 50	700	400	8.49
C-3A-3	150 × 75	750	450	11.55
C-3A-4	200 × 100	800	500	18.50
C-3A-5	250 × 125	850	550	22.65
C-3A-6	300 × 150	900	600	30.67
C-3A-7	400 × 200	1000	700	52.2
C-3A-8	500 × 200	1100	800	63.10
C-3A-9	600 × 200	1200	900	76.54
C-3A-10	800 × 200	1400	1100	104.25

当H>125
时，每端各
12只连接孔

上垂直等径三通 XQJ-C-3B
Upper Vertical Equant T-joint Cable Tray




注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.

型号 Model	规格 Specification	重量kg Weight	护罩 Cover	备注 Remark
C-3B-1	50 × 25	625	325	3.915
C-3B-2	100 × 50	650	350	7.21
C-3B-3	150 × 75	675	375	10.15
C-3B-4	200 × 100	700	400	16.14
C-3B-5	250 × 125	725	425	19.67
C-3B-6	300 × 150	750	450	23.42
C-3B-7	400 × 200	800	500	30.12
C-3B-8	500 × 200	800	500	39.15
C-3B-9	600 × 200	800	500	44.03
C-3B-10	800 × 200	800	500	53.84

当H>125
时，每端各
12只连接孔


下垂直等径三通 XQJ-C-3C
Lower Vertical Equant T-joint Cable Tray

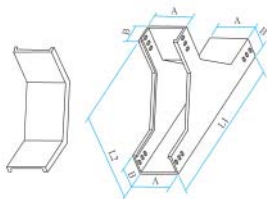

注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型号 Model	规格 Specification			重量kg Weight	护罩 Cover	备注 Remark
	A × B	L1	L2			
C-3C-1	50 × 25	625	325	3.91	0.65	当H>125 时，每端各 12只连接孔
C-3C-2	100 × 50	650	350		1.23	
C-3C-3	150 × 75	675	375	7.11	1.76	
C-3C-4	200 × 100	700	400	10.08	2.2	
C-3C-5	250 × 125	725	425	16.28	2.67	
C-3C-6	300 × 150	750	450	19.93	3.14	
C-3C-7	400 × 200	800	500	23.77	4.54	
C-3C-8	500 × 200	800	500	37.51	5.59	
C-3C-9	600 × 200	800	500	41.12	8.33	
C-3C-10	800 × 200	800	500	47.54	10.93	
37.57						


上边垂直等径三通 XQJ-C-3D
Catadrome Side Vertical Equant T-joint Cable Tray



注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型号 Model	规格 Specification			重量kg Weight	护罩 Cover	备注 Remark
	A × B	L1	L2			
C-3D-1	50 × 25	650	325	3.75	0.81	当H>125 时，每端各 12只连接孔
C-3D-2	100 × 50	700	350	7.03	1.65	
C-3D-3	150 × 75	750	375	10.41	2.52	
C-3D-4	200 × 100	800	400	17.02	3.39	
C-3D-5	250 × 125	850	425	21.51	4.35	
C-3D-6	300 × 150	900	450	26.29	5.4	
C-3D-7	400 × 200	1200	600	45.40	8.8	
C-3D-8	500 × 200	1300	600	52.31	14.96	
C-3D-9	600 × 200	1400	600	63.3	19.4	
C-3D-10	800 × 200	1600	600	82.34	27.63	


下边垂直等径三通 XQJ-C-3E
Catadrome Side Vertical Equant T-joint Cable Tray

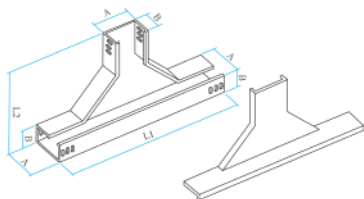

注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型号 Model	规格 Specification			重量kg Weight	护罩 Cover	备注 Remark
	A × B	L1	L2			
C-3E-1	50 × 25	650	325	4.23	0.64	当H>125 时，每端各 12只连接孔
C-3E-2	100 × 50	700	350	8.16	1.48	
C-3E-3	150 × 75	750	375	11.21	2.08	
C-3E-4	200 × 100	800	400	18.3	2.71	
C-3E-5	250 × 125	850	425	22.4	3.64	
C-3E-6	300 × 150	900	450	27.43	5.33	
C-3E-7	400 × 200	1200	600	53.2	7.41	
C-3E-8	500 × 200	1300	600	59.8	10.92	
C-3E-9	600 × 200	1400	600	71.2	15.01	
C-3E-10	800 × 200	1600	600	93.3	24.05	

上角垂直等径三通 XQJ-C-3F
Upper Corner Vertical T-joint Cable Tray

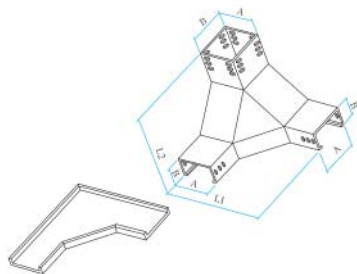


注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型号 Model	规格 Specification	重量 Weight	护罩 Cover	备注 Remark
C-3F-1	50 × 25 350 325	4.92	1.32	当H>125 时，每端各 12只连接孔
C-3F-2	100 × 50 400 350	7.83	1.9	
C-3F-3	150 × 75 450 375	11.29	2.73	
C-3F-4	200 × 100 500 400	15.58	3.66	
C-3F-5	250 × 125 550 425	23.56	4.62	
C-3F-6	300 × 150 600 450	30.53	7.56	
C-3F-7	400 × 200 800 500	52.3	10.92	
C-3F-8	500 × 200 900 500	68.5	14.78	
C-3F-9	600 × 200 1000 500	81.2	19.11	
C-3F-10	800 × 200 1100 500	103.5	30.81	

注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.


下角垂直等径三通 XQJ-C-3G
Lower Corner Vertical T-joint Cable Tray

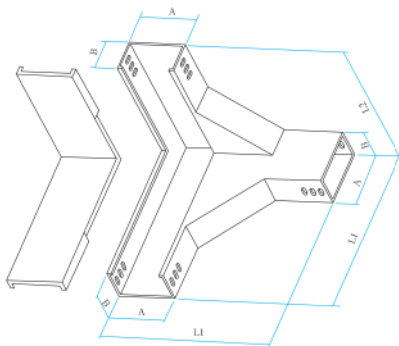

注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.


型号 Model	规格 Specification	重量 Weight	护罩 Cover	备注 Remark
C-3G-1	50 × 25 350 325	4.41	0.79	当H>125 时，每端各 12只连接孔
C-3G-2	100 × 50 400 350	7.77	1.53	
C-3G-3	150 × 75 450 375	11.32	2.27	
C-3G-4	200 × 100 500 400	19.02	2.96	
C-3G-5	250 × 125 550 425	23.61	3.71	
C-3G-6	300 × 150 600 450	28.92	4.5	
C-3G-7	400 × 200 800 500	50.1	7.07	
C-3G-8	500 × 200 900 500	59.3	10.25	
C-3G-9	600 × 200 1000 500	68.5	16.1	
C-3G-10	800 × 200 1200 500	92.3	25.5	

水平等径四通 XQJ-C-4A
Horizontal Equant Cross Cable Tray

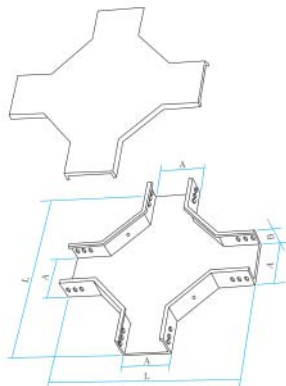


型号 Model	规格 Specification			重量kg Weight	护罩 Cover	备注 Remark
	A × B	L1	L2			
C-4A-1	50 × 25	650	325	7.85	2.79	当H>125 时, 每端各 12只连接孔
C-4A-2	100 × 50	700	350	10.63	4.08	
C-4A-3	150 × 75	750	375	14.97	5.39	
C-4A-4	200 × 100	800	400	25.19	6.74	
C-4A-5	250 × 125	850	425	27.91	8.33	
C-4A-6	300 × 150	900	450	36.2	12.99	
C-4A-7	400 × 200	1000	500	62.3	17.8	
C-4A-8	500 × 200	1100	600	72.1	23.13	
C-4A-9	600 × 200	1200	700	85.5	29.87	
C-4A-10	800 × 200	1400	800	112.25	43.21	


上垂直等径四通 XQJ-C-4B
Upper Vertical Equant Cross Cable Tray

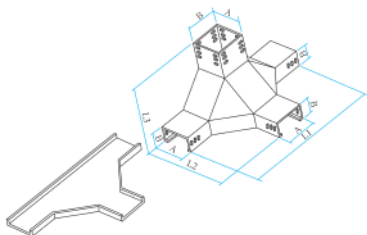


型 号 Model	规格 Specification				重量kg Weight	护 罩 Cover	备 注 Remark
	A × B	L1	L2	L3			
C-4B-1	50 × 25	650	325	325	5.22	1.95	当H>125 时, 每端各 12只连接孔
C-4B-2	100 × 50	700	350	350	8.82	2.91	
C-4B-3	150 × 75	750	375	375	12.62	3.96	
C-4B-4	200 × 100	800	400	400	20.34	5.12	
C-4B-5	250 × 125	850	425	425	25.41	6.38	
C-4B-6	300 × 150	900	450	450	34.16	11.2	
C-4B-7	400 × 200	1000	700	600	63.21	13.2	
C-4B-8	500 × 200	1100	800	600	82.31	17.94	
C-4B-9	600 × 200	1200	900	600	91.56	27.55	
C-4B-10	800 × 200	1400	1100	600	118.5	39.29	




上平异径接头 (一) XQJ-C-5A
Upper Flat Reducing Joint Cable Tray



上平异径接头 (二) XQJ-C-5B
Upper Flat Reducing Joint Cable Tray



下平异径接头 (一) XQJ-C-5C
Lower Flat Reducing Joint Cable Tray



下平异径接头 (二) XQJ-C-5D
Lower Flat Reducing Joint Cable Tray

注: 以上各种规格的外形尺寸及重量相同。

型号 Model	规格 Specification A1 × B1-A2 × B2	L	重量kg Weight	护罩 Cover	备注 Remark
C-5B-1	50 × 25-100 × 50	350	1.28	0.9	当H>125 时, 每端各 12只连接孔
C-5B-2	50 × 25-150 × 75	400	2.01	1.41	
C-5B-3	50 × 25-200 × 100	450	3.59	2.51	
C-5B-4	50 × 25-250 × 125	500	4.49	3.14	
C-5B-5	50 × 25-300 × 150	550	8.64	6.05	
C-5B-6	50 × 25-400 × 200	700	16.24	11.37	
C-5B-7	50 × 25-500 × 200	800	20.90	14.63	
C-5B-8	50 × 25-600 × 200	900	26.41	18.49	
C-5B-9	50 × 25-800 × 200	1100	40.35	28.25	
C-5B-10	100 × 50-150 × 75	350	2.23	1.56	
C-5B-11	100 × 50-200 × 100	400	3.85	2.78	
C-5B-12	100 × 50-250 × 125	450	4.77	3.34	
C-5B-13	100 × 50-300 × 150	500	8.86	6.20	
C-5B-14	100 × 50-400 × 200	650	16.59	11.61	
C-5B-15	100 × 50-500 × 200	750	21.33	14.93	
C-5B-16	100 × 50-600 × 200	850	26.64	18.65	
C-5B-17	100 × 25-800 × 200	1050	38.85	27.20	
C-5B-18	150 × 75-200 × 100	350	3.61	2.53	
C-5B-19	150 × 75-250 × 125	400	4.92	3.44	
C-5B-20	150 × 75-300 × 150	450	8.64	6.05	
C-5B-21	150 × 75-400 × 200	600	16.31	11.42	
C-5B-22	150 × 75-500 × 200	700	21.19	14.83	
C-5B-23	150 × 75-600 × 200	800	26.53	18.57	
C-5B-24	150 × 75-800 × 200	1000	39.11	27.38	
C-5B-25	200 × 100-250 × 125	350	4.42	3.10	
C-5B-26	200 × 100-300 × 150	400	8.16	5.71	
C-5B-27	200 × 100-400 × 200	450	15.70	11.00	
C-5B-28	200 × 100-500 × 200	650	20.60	14.42	
C-5B-29	200 × 100-600 × 200	750	26.07	18.25	
C-5B-30	200 × 100-800 × 200	950	38.67	27.00	
C-5B-31	250 × 100-300 × 150	350	7.54	5.28	
C-5B-32	250 × 125-400 × 200	500	14.94	10.46	
C-5B-33	250 × 125-500 × 200	600	19.95	13.97	
C-5B-34	250 × 125-600 × 200	700	25.78	18.05	
C-5B-35	250 × 125-800 × 200	900	38.43	26.90	
C-5B-36	300 × 150-400 × 200	450	16.72	11.70	
C-5B-37	300 × 150-500 × 200	550	21.86	15.30	
C-5B-38	300 × 150-600 × 200	650	27.50	19.25	
C-5B-39	300 × 150-800 × 200	850	39.04	27.33	
C-5B-40	400 × 200-500 × 200	500	42.93	30.05	
C-5B-41	400 × 200-600 × 200	600	55.64	38.95	
C-5B-42	400 × 200-800 × 200	800	71.74	50.22	
C-5B-43	500 × 200-600 × 200	500	48.74	34.12	
C-5B-44	500 × 200-800 × 200	700	77.58	46.55	
C-5B-45	600 × 200-800 × 200	600	69.30	41.58	

注: 需配护罩时请注明, 配套扣锁价格另计。

Note: The price of locks is exclusive.

梯级式电缆桥架

Ladder-type Cable

XQJ-T₁


XQJ-T₁型梯级式电缆桥架具有重量轻、成本低、造型别具、安装方便、散热、透气性好等优点。它适用于一般直径较大电缆的敷设，特别适用于高、低压动力电缆的敷设。

XQJ-T₁ type of cables has such advantages as light weight, Low cost, special modelling, convenient installation and good cooling and ventilation.


It is suitable for the laying of the cables with bigger diameter, especially suitable for the Laying of the power cables with high or Low voltage.

梯级式电缆桥架在不同跨距下最大允许均布载荷曲线图

The diagram of the maximumly-permitted uniform Load of Ladder-type cable under different spans

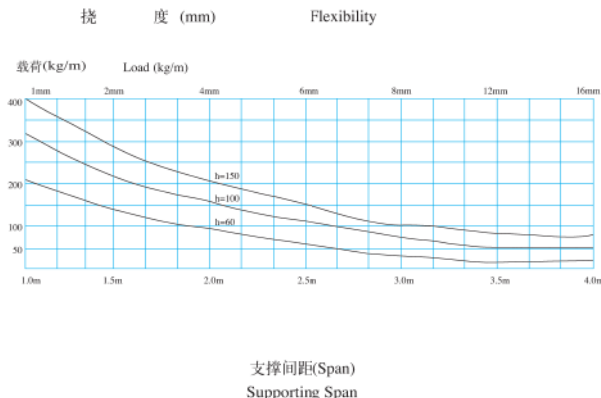


梯级式直通桥架 XQJ-T1-01
Ladder Type Straight Cable Tray Model XQJ-T1-01



注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	重量kg Weight	护 罩 Cover	备 注 Remark
T1-01-6-2	200	60	11.49	8.69	当H=60 H=100时， 每端各6只 连接孔
T1-01-10-2		100	18.18		
T1-01-15-2		150	24.09		
T1-01-6-3	300	60	12.69	14.6	
T1-01-10-3		100	18.19		
T1-01-15-3		150	25.38		
T1-01-6-4	400	60	15.07	23.6	当H=150 时，每端各 12只连接孔
T1-01-10-4		100	20.79		
T1-01-15-4		150	26.69		
T1-01-6-5	500	60	16.3	26.84	
T1-01-10-5		100	22.09		
T1-01-15-5		150	27.99		
T1-01-6-6	600	60	18.1	38.17	
T1-01-10-6		100	23.4		
T1-01-15-6		150	29.31		
T1-01-6-8	800	60	21.3	50.05	
T1-01-10-8		100	26.01		
T1-01-15-8		150	31.92		

梯级式水平弯通 XQJ-T1-02
Ladder Type Horizontal Elbow Joint Cable Tray Model XQJ-T1-02




注：需配护罩时请注明，配套扣锁价格另计。
Note: The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重量kg Weight	护 罩 Cover	备 注 Remark
Tl-02-6-2	200	60	500	5.85	4.28	当H=60 H=100时， 每端各6只 连接孔
Tl-02-10-2		100		7.5		
Tl-02-15-2		150		10.92		
Tl-02-6-3	300	60	600	7.29	6.63	
Tl-02-10-3		100		9.09		
Tl-02-15-3		150		13.26		
Tl-02-6-4	400	60	700	8.7	12.42	
Tl-02-10-4		100		10.74		
Tl-02-15-4		150		15.15		
Tl-02-6-5	500	60	800	10.18	15.27	
Tl-02-10-5		100		12.39		
Tl-02-15-5		150		17.04		
Tl-02-6-6	600	60	900	11.6	21.28	当H=150 时，每端各 12只连接孔
Tl-02-10-6		100		14		
Tl-02-15-6		150		18.9		
Tl-02-6-8	800	60	1100	16.34	32.75	
Tl-02-10-8		100		17.31		
Tl-02-15-8		150		22.7		

梯级式水平三通 XQJ-T1-03

Ladder Type Horizontal T-joint Cable Tray Mode XQJ-T1-03

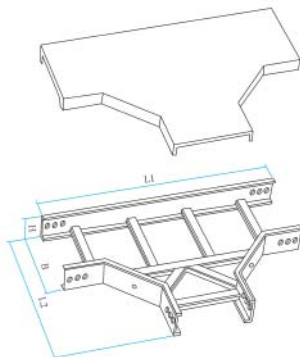

注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.


型号 Model	宽度 B	高度 H	L1	L2	重量 Weight	护罩 Cover	备注 Remark
T1-03-6-2	60				8.28		
T1-03-10-2	200	100	800	500	9.68	7.08	
T1-03-15-2		150			13.2		
T1-03-6-3	60				9.86		
T1-03-10-3	300	100	900	600	12.86	10.34	
T1-03-15-3		150			15.57		
T1-03-6-4	60				12.5		
T1-03-10-4	400	100	1000	700	14.55	19.54	
T1-03-15-4		150			17.42		
T1-03-6-5	60				13.2		
T1-03-10-5	500	100	1100	800	16.24	24.41	
T1-03-15-5		150			20.18		
T1-03-6-6	60				15.3		
T1-03-10-6	600	100	1200	900	17.74	32.57	
T1-03-15-6		150			20.85		
T1-03-6-8	60				18.5		
T1-03-10-8	800	100	1400	1100	21.48	44.00	
T1-03-15-8		150			28.3		

当H=60
H=100时，
每端各6只
连接孔

当H=150
时，每端各
12只连接孔

梯级式水平四通 XQJ-T1-04

Ladder Type Horizontal Cross Cable Tray Model XQJ-T1-04

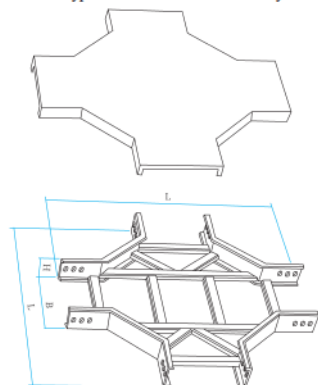

注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.


型号 Model	宽度 B	高度 H	L	重量 Weight	护罩 Cover	备注 Remark
T1-04-6-2	60			10.05		
T1-04-10-2	200	100	800	13.9	10.24	
T1-04-15-2		150	800	20.3		
T1-04-6-3	60			13.45		
T1-04-10-3	300	100	900	15.3	13.57	
T1-04-15-3		150	900	22.5		
T1-04-6-4	60			15.23		
T1-04-10-4	400	100	1000	17.54	24.06	
T1-04-15-4		150	1000	25.3		
T1-04-6-5	60			17.34		
T1-04-10-5	500	100	1100	19.25	30.51	
T1-04-15-5		150	1100	28.48		
T1-04-6-6	60			19.89		
T1-04-10-6	600	100	1200	22.54	33.76	
T1-04-15-6		150	1200	32.9		
T1-04-6-8	60			24.45		
T1-04-10-8	800	100	1400	26.35	53.01	
T1-04-15-8		150	1400	36.72		

当H=60
H=100时，
每端各6只
连接孔

当H=150
时，每端各
12只连接孔

梯级式垂直凹弯通 XQJ-T1-05A

Ladder Type Horizontal Concave Elbow Joint Cable Tray Model XQJ-T1-05A

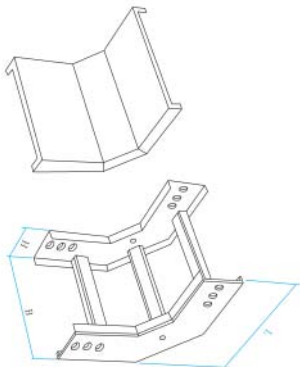


注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.

型号 Model	宽度 B	高度 H	L	重量 Weight	护罩 Cover	备注 Remark
T1-05A-6-2	200	60	360	4.1	3.43	当H=60 H=100时， 每端各6只 连接孔
T1-05A-10-2		100	400	5.93		
T1-05A-15-2		150	450	10.29		
T1-05A-6-3	300	60	360	5.07	4.85	
T1-05A-10-3		100	400	7.68		
T1-05A-15-3		150	450	10.95		
T1-05A-6-4	400	60	360	5.89	8.38	
T1-05A-10-4		100	400	8.5		
T1-05A-15-4		150	450	11.85		
T1-05A-6-5	500	60	360	6.71	9.53	
T1-05A-10-5		100	400	9.32		
T1-05A-15-5		150	450	12.72		
T1-05A-6-6	600	60	360	7.52	11.41	当H=150 时，每端各 12只连接孔
T1-05A-10-6		100	400	10.13		
T1-05A-15-6		150	450	13.53		
T1-05A-6-8	800	60	360	9.16	14.78	
T1-05A-10-8		100	400	11.77		
T1-05A-15-8		150	450	15.18		

梯级式垂直凸弯通 XQJ-T1-05B

Ladder Type Vertical Elbow Joint Cable Tray Model XQJ-T1-05B

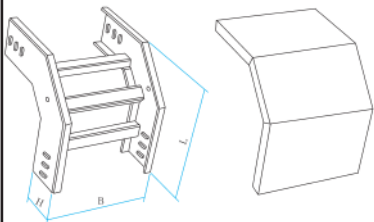

注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.

型号 Model	宽度 B	高度 H	L	重量kg Weight	护罩 Cover	备注 Remark
T1-05B-6-2	200	60	360	5.31	4.26	当H=60 H=100时， 每端各6只 连接孔
T1-05B-10-2		100	400	6.85		
T1-05B-15-2		150	550	10.9		
T1-05B-6-3	300	60	360	6.36	6.5	
T1-05B-10-3		100	400	7.9		
T1-05B-15-3		150	550	11.98		
T1-05B-6-4	400	60	360	7.41	11.12	
T1-05B-10-4		100	400	8.96		
T1-05B-15-4		150	550	13		
T1-05B-6-5	500	60	360	8.46	12.64	
T1-05B-10-5		100	400	10		
T1-05B-15-5		150	550	14.08		
T1-05B-6-6	600	60	360	9.51	16.01	
T1-05B-10-6		100	400	11.01		
T1-05B-15-6		150	550	15.14		
T1-05B-6-8	800	60	360	11.61	20.78	
T1-05B-10-8		100	400	13.16		
T1-05B-15-8		150	550	17.24		



托 盘 式 电 缆 桥 架

Tray-type Cable


XQJ-P₁

XQJ-P₁型托盘式电缆桥架具有重量轻、荷载大、造型美观、结构简单、安装方便等优点，是石油、化工、电力、轻工、电视、电讯等方面应用最广泛的一种。它既适用动力电缆的安装，也适用于控制电缆的敷设。


XQJ-P₁ type of cables has such advantages as Light weight, heavy Load, beautiful modelling, simple structure and convenient installation, widely-used in the fields of oil, chemical industry, electric power, Light industry, television and telecommunications, and also suitable for not only the installation of the power cable, but for the Laying of the control cable.

托盘式电缆桥架在不同跨距下最大允许均布载荷曲线图

The diagram of the maximumly-permitted uniform Load of Tray-type cable under different spans

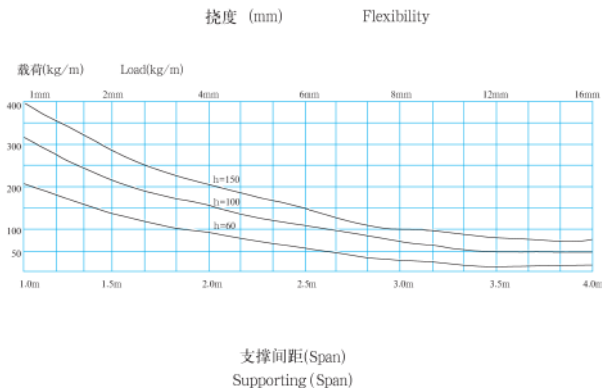

托盘式直通桥架 XQJ-P1-01
Tray Type Straight Cable Tray Model XQJ-P1-01

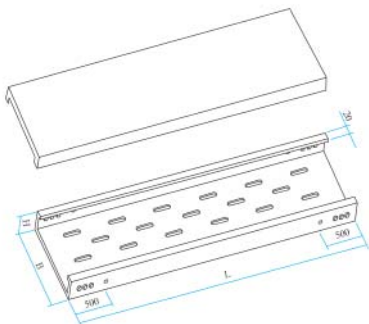


注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	重量kg Weight	护 罩 Cover	备 注 Remark
P1-01-6-2	200	60	16.85	8.69	当H=60 H=100时， 每端各6只 连接孔
P1-01-10-2		100	20.7		
P1-01-15-2		150	25.68		
P1-01-6-3	300	60	21.22	14.6	
P1-01-10-3		100	25.68		
P1-01-15-3		150	30.6		
P1-01-6-4	400	60	26.64	23.60	
P1-01-10-4		100	38.28		
P1-01-15-4		150	49.01		
P1-01-6-5	500	60	45.5	26.84	
P1-01-10-5		100	50.67		
P1-01-15-5		150	57.22		
P1-01-6-6	600	60	52.14	38.17	当H=150 时，每端各 12只连接孔
P1-01-10-6		100	60.71		
P1-01-15-6		150	63.7		
P1-01-6-8	800	60	65.39	50.05	
P1-01-10-8		100	70.59		
P1-01-15-8		150	77.22		

托盘式水平弯通 XQJ-P1-02
Tray Type Horizontal Elbow Joint Cable Tray Model XQJ-P1-02

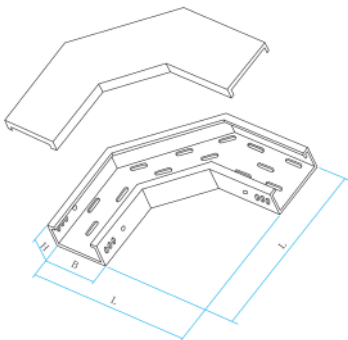


注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重 量kg Weight	护 罩 Cover	备 注 Remark
P1-02-6-2	200	60	500	6.72	3.47	当H=60 H=100时， 每端各6只 连接孔。
P1-02-10-2		100		7.95		
P1-02-15-2		150		10.47		
P1-02-6-3	300	60	600	9.23	6.14	
P1-02-10-3		100		10.65		
P1-02-15-3		150		13.65		
P1-02-6-4	400	60	700	13.2	10.36	
P1-02-10-4		100		18.6		
P1-02-15-4		150		22.8		
P1-02-6-5	500	60	800	22.44	14.56	
P1-02-10-5		100		24.96		
P1-02-15-5		150		31.9		
P1-02-6-6	600	60	900	28.08	21.28	当H=150 时，每端各 12只连接孔。
P1-02-10-6		100		30.84		
P1-02-15-6		150		36.51		
P1-02-6-8	800	60	1100	40.89	32.75	
P1-02-10-8		100		44.14		
P1-02-15-8		150		50.2		

托盘式水平三通 XQJ-P1-03

Tray Type Horizontal T-joint Cable Tray Model XQJ-P1-03




注：需配护罩时请注明，配套锁扣价格另计。

Note: The price of locks is exclusive.

型号 Model	宽度 B	高度 H	L1	L2	重量kg Weight	护罩 Cover	备注 Remark
P1-03-6-2	200	60	800	500	10.95	5.1	当H=60 H=100时， 每端各6只 连接孔
P1-03-10-2		100			13.54		
P1-03-15-2		150			20.1		
P1-03-6-3	300	60	900	600	15.6	11.2	
P1-03-10-3		100			18.3		
P1-03-15-3		150			24.5		
P1-03-6-4	400	60	1000	600	24.28	13.2	
P1-03-10-4		100			27.95		
P1-03-15-4		150			31.2		
P1-03-6-5	500	60	1100	800	30.6	17.94	
P1-03-10-5		100			34.5		
P1-03-15-5		150			41.8		
P1-03-6-6	600	60	1200	900	38.5	27.55	
P1-03-10-6		100			42.5		
P1-03-15-6		150			52.3		
P1-03-6-8	800	60	1400	1100	56.1	39.29	
P1-03-10-8		100			59.5		
P1-03-15-8		150			68.3		

托盘式水平四通 XQJ-P1-04

Tray Type Horizontal Cross Cable Tray Model XQJ-P1-04

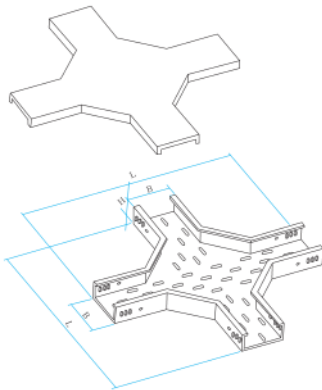


注：需配护罩时请注明，配套锁扣价格另计。

Note: The price of locks is exclusive.

型号 Model	宽度 B	高度 H	L	重量kg Weight	护罩 Cover	备注 Remark
P1-04-6-2	200	60	800	12.93	6.74	当H=60 H=100时， 每端各6只 连接孔
P1-04-10-2		100		16.5		
P1-04-15-2		150		26.1		
P1-04-6-3	300	60	900	19.36	12.99	
P1-04-10-3		100		21.3		
P1-04-15-3		150		30.5		
P1-04-6-4	400	60	1000	28.9	17.8	
P1-04-10-4		100		32.5		
P1-04-15-4		150		43.2		
P1-04-6-5	500	60	1100	34.3	23.13	
P1-04-10-5		100		39.6		
P1-04-15-5		150		53.6		
P1-04-6-6	600	60	1200	45.2	29.87	当H=150 时，每端各 12只连接孔
P1-04-10-6		100		49.3		
P1-04-15-6		150		62.8		
P1-04-6-8	800	60	1400	64.6	43.21	
P1-04-10-8		100		67.6		
P1-04-15-8		150		82.3		

托盘式垂直凹弯通 XQJ-P1-05A

Tray Type Horizontal Concave Elbow Joint Cable Tray Model XQJ-P1-05A

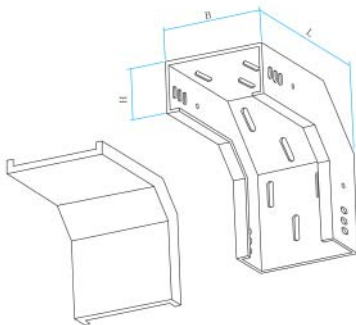


注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重 量kg Weight	护 罩 Cover	备 注 Remark
P1-05A-6-2	200	60	360	5.98	2.17	当H=60 H=100时， 每端各6只 连接孔
P1-05A-10-2		100	400	7.83		
P1-05A-15-2		150	450	13		
P1-05A-6-3	300	60	360	10.79	3.1	
P1-05A-10-3		100	400	12.78		
P1-05A-15-3		150	450	15.24		
P1-05A-6-4	400	60	360	12.34	4.4	当H=150 时，每端各 12只连接孔
P1-05A-10-4		100	400	14.85		
P1-05A-15-4		150	450	19.6		
P1-05A-6-5	500	60	360	13.56	5.39	
P1-05A-10-5		100	400	17.23		
P1-05A-15-5		150	450	23.06		
P1-05A-6-6	600	60	360	24.54	6.4	
P1-05A-10-6		100	400	27.83		
P1-05A-15-6		150	450	33.64		
P1-05A-6-8	800	60	360	32.33	8.44	
P1-05A-10-8		100	400	36.45		
P1-05A-15-8		150	450	45.68		

托盘式垂直凸弯通 XQJ-T1-05B

Tray Type Vertical Elbow Joint Cable Tray Model XQJ-T1-05B



注：需配护罩时请注明，配套扣锁价格另计。

Note: The price of locks is exclusive.

型 号 Model	宽 度 B	高 度 H	L	重 量kg Weight	护 罩 Cover	备 注 Remark
P1-05B-6-2	200	60	360	5.54	4.26	当H=60 H=100时， 每端各6只 连接孔
P1-05B-10-2		100	400	7.08		
P1-05B-15-2		150	450	11.91		
P1-05B-6-3	300	60	360	10.01	6.03	
P1-05B-10-3		100	400	11.64		
P1-05B-15-3		150	450	13.53		
P1-05B-6-4	400	60	360	11.65	10.30	
P1-05B-10-4		100	400	13.25		
P1-05B-15-4		150	450	18.3		
P1-05B-6-5	500	60	360	12.1	12.64	
P1-05B-10-5		100	400	15.45		
P1-05B-15-5		150	450	22.43		
P1-05B-6-6	600	60	360	23.65	16.01	当H=150 时，每端各 12只连接孔
P1-05B-10-6		100	400	26.59		
P1-05B-15-6		150	450	32.53		
P1-05B-6-8	800	60	360	31.24	20.78	
P1-05B-10-8		100	400	35.21		
P1-05B-15-8		150	450	43.26		



组合式电缆桥架 XQJ-ZH

组合式电缆桥架是一种最新型桥架，是电缆桥架系列中的第二代产品。它适用各项工程、各个单位、各种电缆的敷设，它具有结构简单、配置灵活、安装方便、型式新颖等优点。


组合式电缆桥架只要采用宽100、150、200mm的三种基础型就可以组成您所需要的尺寸的电缆桥架，它不需生产弯通、三通等配件就可以根据现场安装需要任意转向、变宽、分支、引上、引下。在任意部位，不需要打孔、焊接就可管引出。它可以方便工程设计，又方便生产运输，更方便安装施工，是目前电缆桥架中最理想的产品。

Combination Cable XQJ-ZH

Combination cable belongs to the newest type, the second-generation product in the series of cables. It's suitable for every project, every unit, and also the laying of various kinds of cables. It has such advantages as simple structure, flexible disposition, convenient installation and new modelling.


Combination cable can be composed to the cable you need to your own measure only by adopting the three basic types like the width 100,150,200mm. It can have the function of turning, width change, division, up or down readily according to the site installation without the necessity of producing such fitting as elbow and three-way. It can be drawn forth using pipes without drilling or welding in any part. It is not only convenient for the project desing, but for the production transportation, even more convenient for the constallation. It is the most ideal product in the family of cables at the present time.

XQJ-ZH-01A型组合式电缆桥架
Combination Cable Bridges

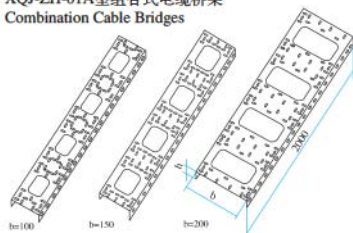


序号 No.	型号 Model	规格b×h Specification	重量kg Weight	备注 Remark
1	ZH-01A-100	100×25	6.28	
2	ZH-01A-150	150×25	8.61	
3	ZH-01A-200	200×25	10.84	

XQJ-ZH-01B型组合式电缆桥架
Combination Cable Bridges

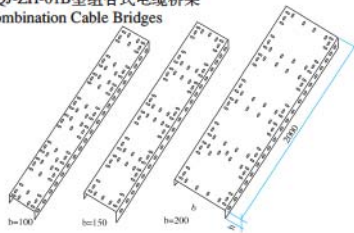


序号 No.	型号 Model	规格b×h Specification	重量kg Weight	备注 Remark
1	ZH-01B-100	100×25	6.28	
2	ZH-01B-150	150×25	8.61	
3	ZH-01B-200	200×25	10.84	

XQJ-ZH-02配线桥架
Allocate Cable Bridges

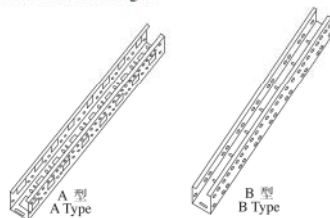


序号 No.	型号 Model	规格 Specification	支撑距离“x”时的电缆负载能力 Spans & Their Loads						重量kg Wt(kg)	备注 Remark
			1.5mm	2mm	2.5mm	3mm	3.5mm	4mm		
1	ZH-02A	50×50	50	30	16	9	5	3	5.85	
2	ZH-02B	50×50	50	33	18	10	6	4	5.85	

XQJ-ZH-03配线桥架
Allocate Cable Bridges

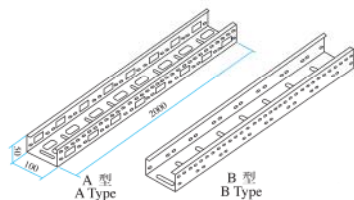


序号 No.	型号 Model	规格 Specification	支撑距离“x”时的电缆负载能力 Spans & Their Loads						重量kg Wt(kg)	备注 Remark
			1.5mm	2mm	2.5mm	3mm	3.5mm	4mm		
1	ZH-03A	100×50	67	38	20	12	7	5	9.64	
2	ZH-03B	100×50	88	50	28	16	10	7	9.64	

XQJ-ZH-04配线桥架
Allocate Cable Bridges




序号 No.	型号 Model	规格 Specification	重量kg Wt(kg)	备注 Remark
1	ZH-04	50×25	4.53	

XQJ-ZH-06连接板
Connecting Plates



序号 No.	型号 Model	规格 Specification	单价元/件 Unit Price (\$)	备注 Remark
1	ZH-06	25×25	5.60	

XQJ-ZH-07连接板
Connecting Plates



序号 No.	型号 Model	规格 Specification	单价元/件 Unit Price (\$)	备注 Remark
1	ZH-07	24×70	4.10	




XQJ-ZH-08连接板
Connecting flake




序号 No.	型号 Model	规格 Specification	单价元/件 Unit Price (\$)	备注 Remark
1	ZH-08	46 × 100	7.20	

XQJ-ZH-09管接头
Pipe Joint




序号 No.	配管G Pipe	安装尺寸 Installation size		单价元/件 Unit Price (\$)	备注 Remark
		L	H		
1	G $\frac{1}{2}$ "	122	74	8.60	配ZH-01-100组合桥架 used with combination type cable tray Model ZH-01-100
2	G $\frac{3}{4}$ "			8.60	
3	G1"			16.20	
4	G1 $\frac{1}{2}$ "			30.80	
5	G2"			40.90	
6	G $\frac{1}{2}$ "	122	124	9.80	配ZH-01-150组合桥架 used with combination type cable tray Model ZH-01-150
7	G $\frac{3}{4}$ "			11.60	
8	G1"			17.40	
9	G1 $\frac{1}{2}$ "			32.00	
10	G2"			42.10	
11	G $\frac{1}{2}$ "	122	174	11.00	配ZH-01-200组合桥架 used with combination type cable tray Model ZH-01-200
12	G $\frac{3}{4}$ "			11.80	
13	G1"			18.60	
14	G1 $\frac{1}{2}$ "			33.20	
15	G2"			43.30	

XQJ-ZH-05盖板
Covers


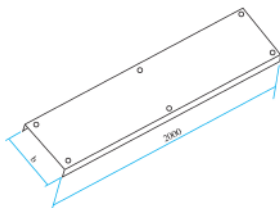


序号 No.	型号 Model	规格b × h Specification	重量kg/节 Weight	备注 Remark
1	ZH-05-50	55 × 20	3.81	
2	ZH-05-100	105 × 20	5.24	
3	ZH-05-150	155 × 20	7.15	
4	ZH-05-200	205 × 20	8.61	
5	ZH-05-300	305 × 20	14.23	
6	ZH-05-400	405 × 20	23.68	
7	ZH-05-500	505 × 20	28.77	
8	ZH-05-600	606 × 20	38.21	
9	ZH-05-700	706 × 20	44.37	
10	ZH-05-800	806 × 20	50.51	


组合式直通桥架组装示意图
Installation Sketch Map of Combination-Type
Straight-Way Bridgeframe

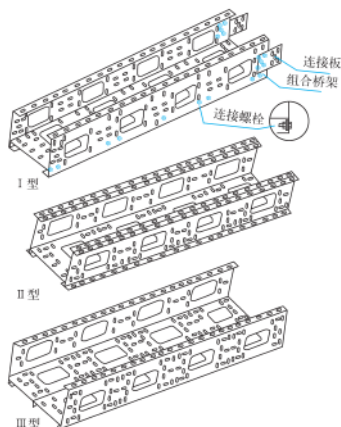



组合式电缆桥架隔板组装示意图
Installation Sketch map of Separating Board
of Combination-Type Cable Bridge frame





组合式电缆桥架水平弯通三通组装示意图
Installation Sketch map of Horizontal Curved-Way, 3-
Way of Combination-Type Cable Bridge frame



组合式电缆桥架水平四通、垂直三通组装示意图
Installation Sketch map of Horizontal 4-Way, Vertical 3-Way of
Combination-Type Cable Bridge frame

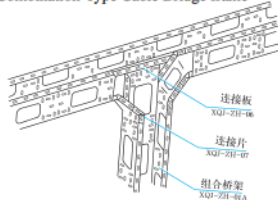

组合式电缆桥架垂直弯通及几种锯切示意图
Sketch map of Vertical Curved-Way and several Sawcut
of Combination-Type Cable Bridge frame

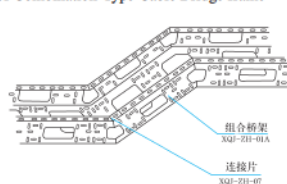



铝合金电缆桥架 XQJ-LQJ系列

LQJ系列铝合金桥架是清华大学与我厂联合开发研制成功的新型产品。随着现代化工业的飞速发展，动力电缆、控制电缆和通信电缆的需求量猛增，因此，电缆桥架得到了广泛应用。它的作用能使厂用、船用乃至海上采油平台的电缆敷设实现了标准化、系列化和通用化的要求，为工程设计、施工安装、安全生产提供了方便。

我们等效采用美国材料标准生产的铝合金桥架具有高抗蚀性能，由于对桥架铝型材截面设计的合理，整体结构紧凑，安装灵活多变致使本产品具有载荷大、重量轻、施工方便、外形美观等突出优点，在国内处于领先地位。


Aluminum Cable XQJ-LQJ series

LQJ series of aluminum cable are new varieties of products resarched and produced by our factory and Qinhua university. with the rapid development of modern industry, the requirement of power cable, control cable and communication cable increases so quickly, therefore cables are widely used. They can be used for the factory and the ship, so that the cable laying of the oil extraction terrace in the sea reaches standardization, and general purpose. They give the convinience to the project design, construction installlation and safe production.

The aluminum cable produced by our factory is adopted with the same effect by the standarization of American material, having the function of high touch-resistence. Because of the reasonable design of the cross section of aluminum material, the integral structure is so compact, flexible and changeable in installation that it has such advantages as heavy load, ligh weight, convenient installation and beautiful modelling, holding a safe lead at home and adroad.

高防腐铝合金电缆桥架系列

HIGH ANTI-CORROSION ALUMINUM CABLE TRAY SERIES


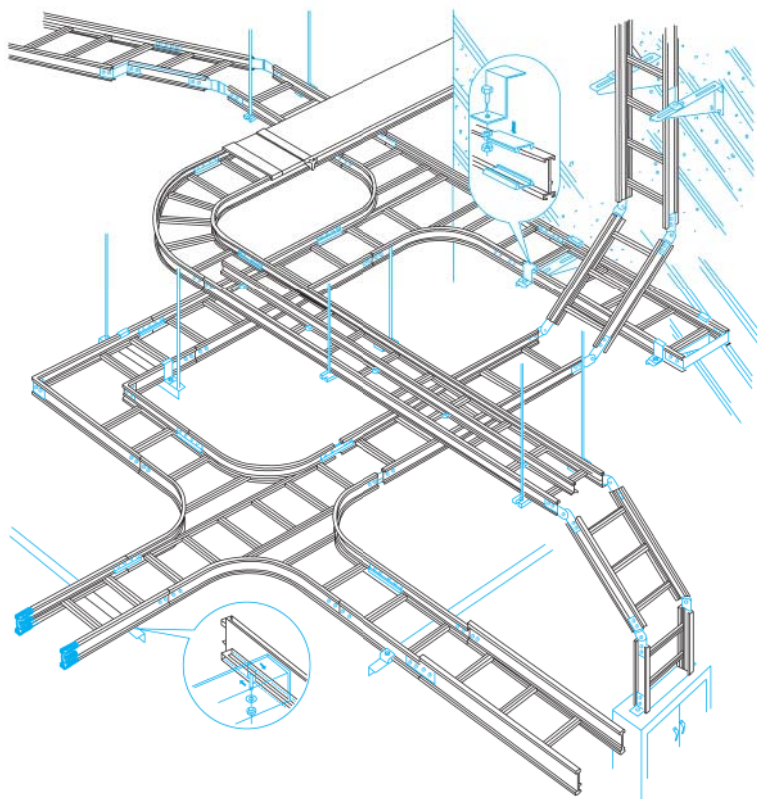


型式和技术参数


- 1.XQJ-LQJ 系列铝合金桥架可分为梯级式、槽式，分别用T、C表示。
- 2.梯级式桥架具有良好的通风性能，不防尘，不防干扰。槽式桥架具有防尘、防干扰性能。
- 3.桥架长度 $\leq 6m$ ，当长度 $>6m$ 时可接受特殊订货。
- 4.梯级式、槽式载荷性能参照下图：

TYPES AND TECHNICAL PARAMETRES

- 1.LQJ series of aluminum alloy dridge frames can be divided into ladder-shaped and troughshaped ones, separa tely represented by T、C.
- 2.Ladder-shapped frames have function of being ventilated, non dust-proof and non-disturbance-proof.
- 3.The cable tray Length is not more than 6 meters. When it is more than 6 meters, we may accept special orders.
- 4.The functdqions of the ladder-shape, trough-shape refer to the following charts.

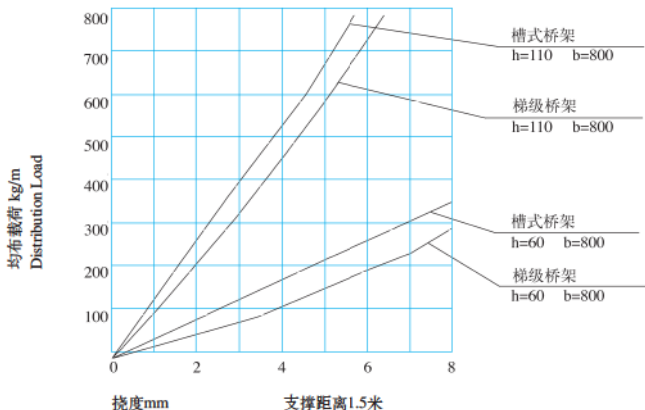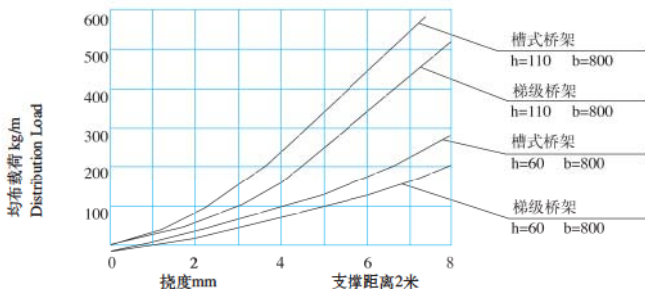


XQJ-LQJ-T型梯级式桥架
LQJ-T Ladder Frame

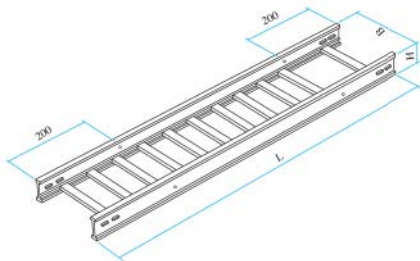


型号 Model	宽度 B	高度 H	重量 (kg)	护罩 Cover
LQJ-T-6-10	100	60	6.33	2.71
LQJ-T-6-20	200		7.12	4.72
LQJ-T-6-30	300		7.79	6.68
LQJ-T-6-40	400		8.88	8.66
LQJ-T-11-20	200	110	9.44	4.72
LQJ-T-11-30	300		10.06	6.68
LQJ-T-11-40	400		11.54	8.66
LQJ-T-11-50	500		12.21	12.75
LQJ-T-11-60	600	140	12.86	15.11
LQJ-T-11-80	800		14.20	23.13
LQJ-T-11-100	1000		15.54	28.63
LQJ-T-14-40	400		13.13	8.66
LQJ-T-14-50	600	180	14.45	15.11
LQJ-T-14-60	800		15.80	23.13
LQJ-T-14-80	1000		17.14	28.63
LQJ-T-14-100	400		15.91	8.66
LQJ-T-18-60	600	200	17.59	15.11
LQJ-T-18-80	800		19.16	23.13
LQJ-T-18-100	1000		20.88	28.63
LQJ-T-20-40	400		16.24	8.66
LQJ-T-20-60	600	200	19.58	15.11
LQJ-T-20-80	800		21.59	23.13
LQJ-T-20-100	1000		23.58	28.63

XQJ-LQJ-RT型水平弯通
LQJ-RT Horizontal Elbow

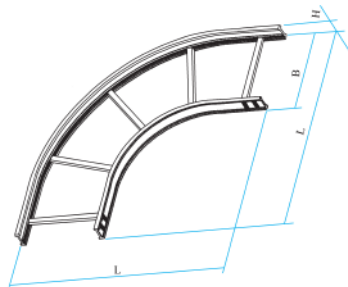


型号 Model	宽度 B	高度 H	L R=300	重量 (kg)	护罩 Cover
LQJ-RT-6-10	100	60	600	3.51	0.84
LQJ-RT-6-20	200		700	3.68	1.62
LQJ-RT-6-30	300		800	4.52	2.51
LQJ-RT-6-40	400		900	5.35	4.70
LQJ-RT-11-20	200	110	700	4.82	1.62
LQJ-RT-11-30	300		800	5.88	2.51
LQJ-RT-11-40	400		900	6.86	4.70
LQJ-RT-11-50	500		1000	8.26	6.24
LQJ-RT-11-60	600	140	1100	10.08	8.72
LQJ-RT-11-80	800		1200	12.74	13.40
LQJ-RT-11-100	1000		1300	15.68	16.02
LQJ-RT-14-40	400		900	9.24	4.70
LQJ-RT-14-50	600	180	1100	10.64	8.72
LQJ-RT-14-60	800		1300	15.26	13.40
LQJ-RT-14-80	1000		1500	18.06	16.02
LQJ-RT-14-100	400		900	11.62	4.70
LQJ-RT-18-60	600	200	1100	13.02	8.72
LQJ-RT-18-80	800		1300	17.64	13.40
LQJ-RT-18-100	1000		1500	20.44	16.02
LQJ-RT-20-40	400		900	14.00	4.70
LQJ-RT-20-60	600	200	1100	15.40	8.72
LQJ-RT-20-80	800		1300	20.02	13.40
LQJ-RT-20-100	1000		1500	22.82	16.02

XQJ-LQJ-ST型水平三通
LQJ-ST Horizontal Elbow




型 号 Model	宽 度 B	高 度 H	L1 R=300	L2 R=300	重 量 (kg)	护 罩 Cover
LQJ-ST-6-10	100	60	1100	600	4.98	1.52
LQJ-ST-6-20	200		1200	700	5.83	2.93
LQJ-ST-6-30	300		1300	800	6.84	4.52
LQJ-ST-6-40	400		1400	900	7.28	8.46
LQJ-ST-11-20	200		1200	700	7.83	2.93
LQJ-ST-11-30	300	110	1300	800	8.74	4.52
LQJ-ST-11-40	400		1400	900	9.98	8.46
LQJ-ST-11-50	500		1500	1000	10.64	11.22
LQJ-ST-11-60	600		1600	1100	11.87	12.54
LQJ-ST-11-80	800		1800	1200	15.43	24.11
LQJ-ST-11-100	1000		2000	1300	19.02	28.83
LQJ-ST-14-40	400	140	1400	900	12.01	8.46
LQJ-ST-14-50	500		1600	1100	14.56	12.45
LQJ-ST-14-60	600		1800	1300	17.29	24.11
LQJ-ST-14-80	800		2000	1500	19.72	28.83
LQJ-ST-14-100	1000		2200	1700	22.09	33.48
LQJ-ST-18-60	600	180	1400	900	14.38	8.46
LQJ-ST-18-80	800		1600	1100	16.93	12.54
LQJ-ST-18-100	1000		1800	1300	19.66	24.11
LQJ-ST-18-120	1200		2000	1500	22.09	28.83
LQJ-ST-20-40	400	200	1400	900	17.70	8.46
LQJ-ST-20-60	600		1600	1100	21.32	12.54
LQJ-ST-20-80	800		1800	1300	26.21	24.11
LQJ-ST-20-100	1000		2000	1500	31.74	28.83

XQJ-LQJ-ST4型水平四通
LQJ-ST4 Horizontal Cross

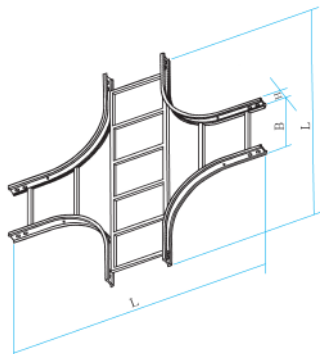


型 号 Model	宽 度 B	高 度 H	L R=300	重 量 (kg)	护 罩 Cover
LQJ-ST4-6-10	100	60	1100	6.60	2.10
LQJ-ST4-6-20	200		1200	7.80	4.05
LQJ-ST4-6-30	300		1300	9.02	6.27
LQJ-ST4-6-40	400		1400	10.64	11.73
LQJ-ST4-11-20	200		1200	9.77	4.05
LQJ-ST4-11-30	300	110	1300	10.95	6.27
LQJ-ST4-11-40	400		1400	12.59	11.73
LQJ-ST4-11-50	500		1500	13.88	15.60
LQJ-ST4-11-60	600		1600	15.15	21.78
LQJ-ST4-11-80	800		1800	18.60	33.48
LQJ-ST4-11-100	1000	140	2000	22.50	40.09
LQJ-ST4-14-40	400		1400	13.41	11.73
LQJ-ST4-14-50	500		1600	15.96	21.78
LQJ-ST4-14-60	600		1800	18.69	33.48
LQJ-ST4-14-80	800		2000	22.80	40.09
LQJ-ST4-14-100	1000	180	2200	25.78	40.09
LQJ-ST4-18-60	600		1400	15.78	11.73
LQJ-ST4-18-80	800		1600	18.33	21.78
LQJ-ST4-18-100	1000		1800	21.06	33.48
LQJ-ST4-18-120	1200		2000	24.21	40.09
LQJ-ST4-20-40	400	200	1400	21.90	11.73
LQJ-ST4-20-60	600		1600	25.76	21.78
LQJ-ST4-20-80	800		1800	30.90	33.48
LQJ-ST4-20-100	1000		2000	36.75	40.09

LQJ-C型槽式桥架
LQJ-C Trough-Shaped Frame

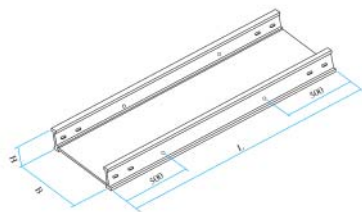

型号 Model	宽度 B	高度 H	重量 (kg)	护罩 Cover
LQJ-C-6-10	100	60	10.09	2.71
LQJ-C-6-20	200		11.10	4.72
LQJ-C-6-30	300		12.09	6.68
LQJ-C-6-40	400		13.13	8.66
LQJ-C-11-20	200	110	14.55	4.72
LQJ-C-11-30	300		15.57	6.68
LQJ-C-11-40	400		16.58	8.66
LQJ-C-11-50	500		19.22	12.75
LQJ-C-11-60	600	140	21.69	15.11
LQJ-C-11-80	800		29.85	23.13
LQJ-C-11-100	1000		35.46	28.63
LQJ-C-14-40	400	180	19.78	8.66
LQJ-C-14-50	500		21.80	15.11
LQJ-C-14-60	600		30.27	23.13
LQJ-C-14-80	800		36.05	28.63
LQJ-C-14-100	1000	200	24.10	8.66
LQJ-C-18-60	600		26.13	15.11
LQJ-C-18-80	800		30.96	23.13
LQJ-C-18-100	1000		36.86	28.63
LQJ-C-20-40	400	200	23.58	8.66
LQJ-C-20-60	600		31.25	15.11
LQJ-C-20-80	800		40.31	23.13
LQJ-C-20-100	1000		46.95	28.63


LQJ-RC型水平弯通
LQJ-RC Horizontal Elbow



型号 Model	宽度 B	高度 H	L R=300	重量 (kg)	护罩 Cover
LQJ-RC-6-10	100	60	600	3.75	0.84
LQJ-RC-6-20	200		700	4.36	1.62
LQJ-RC-6-30	300		800	5.60	2.51
LQJ-RC-6-40	400		900	6.99	4.70
LQJ-RC-11-20	200	110	700	6.04	1.62
LQJ-RC-11-30	300		800	7.05	2.51
LQJ-RC-11-40	400		900	8.23	4.70
LQJ-RC-11-50	500		1000	9.91	6.24
LQJ-RC-11-60	600	140	1100	12.56	8.72
LQJ-RC-11-80	800		1200	16.85	13.40
LQJ-RC-11-100	1000		1300	23.88	16.02
LQJ-RC-14-40	400	180	900	14.70	4.70
LQJ-RC-14-50	500		1100	12.76	8.72
LQJ-RC-14-60	600		1300	18.30	13.40
LQJ-RC-14-80	800		1500	24.23	16.02
LQJ-RC-14-100	1000	200	900	16.26	4.70
LQJ-RC-18-60	600		1100	15.62	8.72
LQJ-RC-18-80	800		1300	21.16	13.40
LQJ-RC-18-100	1000		1500	24.52	16.02
LQJ-RC-20-40	400	200	900	16.80	4.70
LQJ-RC-20-60	600		1100	19.19	8.72
LQJ-RC-20-80	800		1300	24.70	13.40
LQJ-RC-20-100	1000		1500	32.93	16.02




LQJ-SC1型水平三通
LQJ-SC Horizontal Elbow



型号 Model	宽度 B	高度 H	L1 R=300	L2 R=300	重量 (kg)	护罩 Cover
LQJ-SC-6-10	100	60	1100	600	5.73	1.52
LQJ-SC-6-20	200		1200	700	7.98	2.92
LQJ-SC-6-30	300		1300	800	10.13	4.52
LQJ-SC-6-40	400		1400	900	11.90	8.46
LQJ-SC-11-20	200	110	1200	700	9.62	2.93
LQJ-SC-11-30	300		1300	800	11.82	4.52
LQJ-SC-11-40	400		1400	900	14.64	8.46
LQJ-SC-11-50	500		1500	1000	21.26	11.22
LQJ-SC-11-60	600	140	1600	1100	25.04	12.54
LQJ-SC-11-80	800		1800	1200	33.11	24.11
LQJ-SC-11-100	1000		2000	1300	44.22	28.83
LQJ-SC-14-40	400	180	1400	900	14.90	8.46
LQJ-SC-14-50	500		1600	1100	22.71	12.45
LQJ-SC-14-60	600		1800	1300	33.29	24.11
LQJ-SC-14-80	800		2000	1500	44.52	28.83
LQJ-SC-14-100	1000	200	1400	900	17.25	8.46
LQJ-SC-18-60	600		1600	1100	24.05	12.54
LQJ-SC-18-80	800		1800	1300	34.73	24.11
LQJ-SC-18-100	1000		2000	1500	44.67	28.83
LQJ-SC-20-40	400	200	1400	900	22.36	8.46
LQJ-SC-20-60	600		1600	1100	46.52	12.54
LQJ-SC-20-80	800		1800	1300	43.88	24.11
LQJ-SC-20-100	1000		2000	1500	56.85	28.83

LQJ-SC4型水平四通
LQJ-SC4 Horizontal Cross



型号 Model	宽度 B	高度 H	L R=300	重量 (kg)	护罩 Cover
LQJ-ST4-6-10	100	60	1100	8.10	2.10
LQJ-ST4-6-20	200		1200	10.74	4.05
LQJ-ST4-6-30	300		1300	13.44	6.27
LQJ-ST4-6-40	400		1400	16.70	11.73
LQJ-ST4-11-20	200	110	1200	12.71	4.05
LQJ-ST4-11-30	300		1300	15.39	6.27
LQJ-ST4-11-40	400		1400	18.65	11.73
LQJ-ST4-11-50	500		1500	24.23	15.60
LQJ-ST4-11-60	600	140	1600	28.05	21.78
LQJ-ST4-11-80	800		1800	41.84	33.48
LQJ-ST4-11-100	1000		2000	53.82	40.09
LQJ-ST4-14-40	400	180	1400	18.96	11.73
LQJ-ST4-14-50	500		1600	28.35	21.78
LQJ-ST4-14-60	600		1800	41.84	33.48
LQJ-ST4-14-80	800		2000	54.12	40.09
LQJ-ST4-14-100	1000	200	1400	19.05	11.73
LQJ-ST4-18-60	600		1600	28.44	21.78
LQJ-ST4-18-80	800		1800	41.93	33.48
LQJ-ST4-18-100	1000		2000	54.21	40.09
LQJ-ST4-20-40	400	200	1400	27.96	11.73
LQJ-ST4-20-60	600		1600	38.66	21.78
LQJ-ST4-20-80	800		1800	53.84	33.48
LQJ-ST4-20-100	1000		2000	68.07	40.09



防火电缆桥架 FQJ系列

FQJ系列电缆桥架有良好的绝热、防火、防腐和适用于广泛环境的性能，还具有重量轻、承载量大、安全可靠的特点，技术上达到了国内先进水平。

对于不同使用场合，FQJ系列防火槽盒可分为四部分：

1) 耐火型全封闭槽盒：该产品适用于10KV以下电力电缆，以及控制电缆、照明配线等室内室外架空电缆沟、隧道的敷设。

2) 耐火型半封闭槽盒：该产品能够经受火焰熏烤，槽内温度可以限制在电缆安全运行允许值内，盒盖为双层盖板。除了有防雨功能外，在遇高温时可自动下落，盖住散热孔，隔绝空气。

3) 电缆隧道用耐火槽盒：该产品可广泛用隧道、地下公共设施等场合。具有良好的通风透气性，当槽盒着火或电缆过热时，由于火焰作用使原来开启的浸有特种防火涂料的通风网孔堵塞，并膨胀成厚厚的碳层包复电缆，网上小盖自动下落，盖住网面，使燃烧介质缺氧自熄。

4) 耐火型无机槽盒：该产品用无机材料与增强玻璃纤维构成，耐火结构为全封闭式，有效防止电缆自燃及外部火种的危害。另由于选用无机材料，特别适用于酸、碱腐蚀严重的场合。

Fire-proof Cables FQJ series

FQJ series of cable have good function like heat insulation, fire-proof, corrosion-resisting and also are suitable for wide-ranging environment. They have characteristics of light weight, heavy load and reliable safety, and also have reached the advanced standard in country.

FQJ series of fire-proof channel box can be divided into four parts as follows according to different use occasions.


(1). Fully-sealed channel box of fire-proof type: The product suits the power cable below 10kv, and also suits the control cable, lightning lines to be laid in the aerial cable ditch and channel indoors or outdoors.

(2). Half-sealed channel box of the fire-proof type: The product can experience flame stifling, temperature in the channel can be limited to be permitted value for the safety motion of cable. The box cover is double board. Besides the function against rain, it can fall automatically when temperature is high enough, covering the cooling hole to avoid air.

(3). Fire-proof channel box for cable tunnel: The product is widely-used for the tunnel, some underground public facilities and some other occasions. It's well ventilated. When the channel box catches fire or the cable is hotter, the opened ventilated mesh soaked with special refractory coating is blocked because of the flames, and also expanded to thick carbon bits covering the cable, the small cover on the net falls automatically to cover the net face, as a result, causing the burning medium to go out because of the absence of Oxygen.


(4). Inorganic channel box of fire-proof type: The product is formed with the inorganic material and strengthened glass fibre. The refractory structure is fully sealed. It can prevent efficiently the self-burning of the cable and the danger of the outer kindling material. Because of inorganic material, it is especially suitable for the occasions of serious acid and alkali corrosion.

耐火型全封闭槽盒 FQJ-01A




型 号 Model	外 型 尺 寸		内 截 面 宽 × 高	
	槽 宽	边 高		
FQJ-01A-15a	150	100	100	60
FQJ-01A-20a	200	100	150	60
FQJ-01A-30a	300	100	250	60
FQJ-01A-40a	400	100	350	60
FQJ-01A-20b	200	150	150	110
FQJ-01A-30b	300	150	250	110
FQJ-01A-40b	400	150	350	110
FQJ-01A-50b	500	150	450	110
FQJ-01A-30c	300	200	250	160
FQJ-01A-40c	400	200	350	160
FQJ-01A-50c	500	200	450	160
FQJ-01A-60c	600	200	550	160
FQJ-01A-40d	400	250	350	210
FQJ-01A-50d	500	250	450	210
FQJ-01A-60d	600	250	550	210
FQJ-01A-80d	800	250	750	210
FQJ-01A-50e	500	300	450	260
FQJ-01A-60e	600	300	550	260

耐火型半封闭槽盒 FQJ-01B




型 号 Model	外 型 尺 寸		内 截 面 宽 × 高	
	槽 宽	边 高		
FQJ-01B-15a	150	100	100	60
FQJ-01B-20a	200	100	150	60
FQJ-01B-30a	300	100	250	60
FQJ-01B-40a	400	100	350	60
FQJ-01B-20b	200	150	150	110
FQJ-01B-30b	300	150	250	110
FQJ-01B-40b	400	150	350	110
FQJ-01B-50b	500	150	450	110
FQJ-01B-30c	300	200	250	160
FQJ-01B-40c	400	200	350	160
FQJ-01B-50c	500	200	450	160
FQJ-01B-60c	600	200	550	160
FQJ-01B-40d	400	250	350	210
FQJ-01B-50d	500	250	450	210
FQJ-01B-60d	600	250	550	210
FQJ-01B-80d	800	250	7x50	210
FQJ-01B-50e	500	300	450	260
FQJ-01B-60e	600	300	550	260

电缆隧道用耐火槽盒 FQJ-01C




型 格 Model	外 型 尺 寸		内 截 面	
	槽 宽	边 高	宽 × 高	
FQJ-01C-15a	150	100	100	60
FQJ-01C-20a	200	100	150	60
FQJ-01C-30a	300	100	250	60
FQJ-01C-40a	400	100	350	60
FQJ-01C-20b	200	150	150	110
FQJ-01C-30b	300	150	250	110
FQJ-01C-40b	400	150	350	110
FQJ-01C-50b	500	150	450	110
FQJ-01C-30c	300	200	250	160
FQJ-01C-40c	400	200	350	160
FQJ-01C-50c	500	200	450	160
FQJ-01C-60c	600	200	550	160
FQJ-01C-40d	400	250	350	210
FQJ-01C-50d	500	250	450	210
FQJ-01C-60d	600	250	550	210
FQJ-01C-80d	800	250	750	210
FQJ-01C-50e	500	300	450	260
FQJ-01C-60e	600	300	550	260

耐火型无机槽盒 FQJ-01D




型 格 Model	外 型 尺 寸		内 截 面	
	槽 宽	边 高	宽 × 高	
FQJ-01D-15a	150	100	130	80
FQJ-01D-20a	200	100	180	80
FQJ-01D-30a	300	100	180	80
FQJ-01D-40a	400	100	380	80
FQJ-01D-20b	200	150	180	130
FQJ-01D-30b	300	150	280	130
FQJ-01D-40b	400	150	380	130
FQJ-01D-50b	500	150	480	130
FQJ-01D-30c	300	200	280	180
FQJ-01D-40c	400	200	380	180
FQJ-01D-50c	500	200	480	180
FQJ-01D-60c	600	200	580	180
FQJ-01D-40d	400	250	380	230
FQJ-01D-50d	500	250	480	230
FQJ-01D-60d	600	250	580	230
FQJ-01D-80d	800	250	780	230
FQJ-01D-50e	500	300	480	280
FQJ-01D-60e	600	300	580	280

水平弯通 FQJ-PW-02A



型 格 Model	外 型 尺 寸			内 截 面	
	槽 宽	边 高	L1	宽 × 高	
FQJ-PW-02A-15a	150	100	450	100	60
FQJ-PW-02A-20a	200	100	500	150	60
FQJ-PW-02A-30a	300	100	600	250	60
FQJ-PW-02A-40a	400	100	700	350	60
FQJ-PW-02A-20b	200	150	500	150	110
FQJ-PW-02A-30b	300	150	600	250	110
FQJ-PW-02A-40b	400	150	700	350	110
FQJ-PW-02A-50b	500	150	800	450	110
FQJ-PW-02A-30c	300	200	600	250	160
FQJ-PW-02A-40c	400	200	700	350	160
FQJ-PW-02A-50c	500	200	800	450	160
FQJ-PW-02A-60c	600	200	900	550	160
FQJ-PW-02A-40d	400	250	700	350	210
FQJ-PW-02A-50d	500	250	800	450	210
FQJ-PW-02A-60d	600	250	900	550	210
FQJ-PW-02A-80d	800	250	1100	750	210
FQJ-PW-02A-50e	500	300	800	450	260
FQJ-PW-02A-60e	600	300	900	550	260

变径直通 FQJ-BJ-02A





型 格 Model	外 型 尺 寸			内 截 面	
	A1 × B1	A2 × B2	L	a1 × b1	a2 × b2
FQJ-BJ-02A-20a-1	200 × 100	300 × 150	400	150 × 60	250 × 110
FQJ-BJ-02A-20a-2	200 × 100	400 × 200	500	150 × 60	350 × 160
FQJ-BJ-02A-20a-3	200 × 100	500 × 200	600	150 × 60	450 × 160
FQJ-BJ-02A-20a-4	200 × 100	600 × 200	700	150 × 60	550 × 160
FQJ-BJ-02A-30b-1	300 × 150	400 × 200	500	250 × 110	350 × 160
FQJ-BJ-02A-30b-2	300 × 150	500 × 200	600	250 × 110	450 × 160
FQJ-BJ-02A-30b-3	300 × 150	600 × 200	700	250 × 110	550 × 160
FQJ-BJ-02A-30b-4	300 × 150	800 × 200	900	250 × 110	750 × 160
FQJ-BJ-02A-40c-1	400 × 200	500 × 200	500	350 × 160	450 × 160
FQJ-BJ-02A-40c-2	400 × 200	600 × 200	600	350 × 160	550 × 160
FQJ-BJ-02A-40c-3	400 × 200	800 × 200	800	350 × 160	750 × 160
FQJ-BJ-02A-50d-1	500 × 200	600 × 200	500	450 × 160	550 × 160
FQJ-BJ-02A-50d-2	500 × 200	800 × 200	700	450 × 160	750 × 160
FQJ-BJ-02A-60e-1	600 × 200	800 × 200	600	550 × 160	750 × 160

XQJ-ZBQ阻燃玻璃钢电缆桥架

阻燃玻璃钢电缆桥架是我厂在钢制电缆桥架等生产的基础上，研制的一种新型产品。它具有强度高、绝缘性能好、耐化学腐蚀、耐火阻燃性能和足够的机械强度，广泛适用于石油、化工、冶金、电力。


Flame-retardant fibreglass reinforced plastic cable support system is a new-type product developed by this factory on the basis of steel cable support systems. It is featured by high strength, fine insulation property, resistance to chemical corrosion, flame resistance and sufficient mechanical strength. It is broadly used in petroleum, chemical, metallurgical and power industries.

XQJ-ZBQ阻燃玻璃钢桥架在不同跨距下最大允许均布载荷变形量见下图

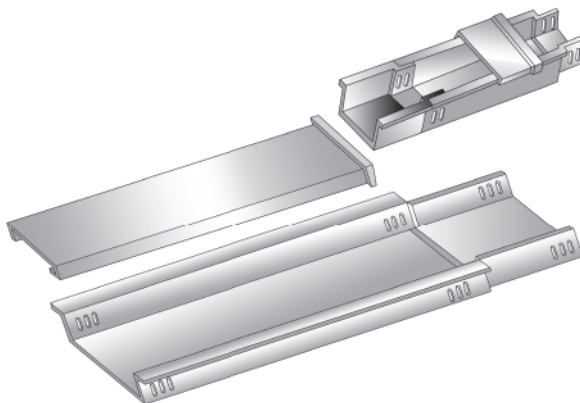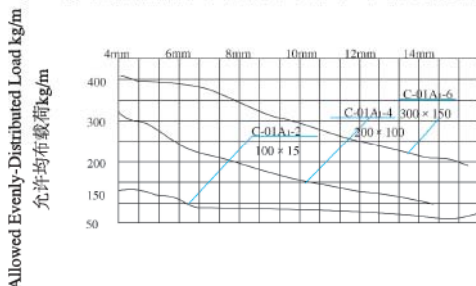

阻燃槽式直通 XQJ-ZBQ-C-01A₁


Fire retarding channel straight piece



No.	Model	Size	Thickness
序号	型号	规格 A × B	厚度 mm
1	ZBQ-C-01A ₁	50 × 25	2
2	ZBQ-C-01A ₁	100 × 50	2.5
3	ZBQ-C-01A ₁	150 × 75	3
4	ZBQ-C-01A ₁	200 × 100	3
5	ZBQ-C-01A ₁	250 × 125	3.5
6	ZBQ-C-01A ₁	300 × 150	3.5
7	ZBQ-C-01A ₁	400 × 200	4.5
8	ZBQ-C-01A ₁	500 × 200	5.5
9	ZBQ-C-01A ₁	600 × 200	6.5
10	ZBQ-C-01A ₁	800 × 200	7.5

阻燃槽式直通 XQJ-ZBQ-C-01A₂


Fire retarding channel straight piece



No.	Model	Size	Thickness
序号	型号	规格 A × B	厚度 mm
1	ZBQ-C-01A ₂	50 × 25	2
2	ZBQ-C-01A ₂	100 × 50	2.5
3	ZBQ-C-01A ₂	150 × 75	3
4	ZBQ-C-01A ₂	200 × 100	3
5	ZBQ-C-01A ₂	250 × 125	3.5
6	ZBQ-C-01A ₂	300 × 150	3.5
7	ZBQ-C-01A ₂	400 × 200	4.5
8	ZBQ-C-01A ₂	500 × 200	5.5
9	ZBQ-C-01A ₂	600 × 200	6.5
10	ZBQ-C-01A ₂	800 × 200	7.5

阻燃槽式直通短节 XQJ-ZBQ-C-01B

Fire retarding channel straight short piece




Three sizes are available for L: 500, 1000 and 1500.
Please order according to your design drawings.

No.	Model	Size	Thickness	Remarks
序号	型号	规格 A × B	厚度 mm	备注
1	ZBQ-C-01B	50 × 25	2	L的长度有 500、1000、 1500三种请 按你设计图 纸接需订货
2	ZBQ-C-01B	100 × 50	2.5	
3	ZBQ-C-01B	150 × 75	3	
4	ZBQ-C-01B	200 × 100	3	
5	ZBQ-C-01B	250 × 125	3.5	
6	ZBQ-C-01B	300 × 150	3.5	
7	ZBQ-C-01B	400 × 200	4.5	
8	ZBQ-C-01B	500 × 200	5.5	
9	ZBQ-C-01B	600 × 200	6.5	
10	ZBQ-C-01B	800 × 200	7.5	

阻燃槽式大跨距桥架 ZQC-ZBQ-01A_i


Fire retarding large span support

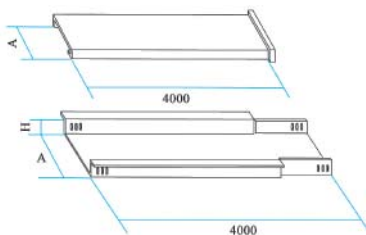

No.	Model	Size	No.	Model	Size
序号	型号	规格	序号	型号	规格
1	ZBQ-DC-01A _i	50×25	1	ZBQ-DC-01A _i	50×25
2	ZBQ-DC-01A _i	100×50	2	ZBQ-DC-01A _i	100×50
3	ZBQ-DC-01A _i	150×75	3	ZBQ-DC-01A _i	150×75
4	ZBQ-DC-01A _i	200×100	4	ZBQ-DC-01A _i	200×100
5	ZBQ-DC-01A _i	250×125	5	ZBQ-DC-01A _i	250×125
6	ZBQ-DC-01A _i	300×150	6	ZBQ-DC-01A _i	300×150
7	ZBQ-DC-01A _i	400×200	7	ZBQ-DC-01A _i	400×200
8	ZBQ-DC-01A _i	500×200	8	ZBQ-DC-01A _i	500×200
9	ZBQ-DC-01A _i	600×200	9	ZBQ-DC-01A _i	600×200
10	ZBQ-DC-01A _i	800×200	10	ZBQ-DC-01A _i	800×200

阻燃托盘式桥架

Fire retarding tray type support

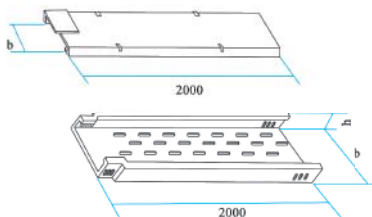

(1) This type of support is provided with cover.

Please indicate in order when required.

(2) The bend for straight tray support is the same as for channel type.

There are 6 connection holes at each end for height h=60 and h=100

There are 12 connection holes at each end for height h=150

No. Model Remarks


序号	型号	b	h	备注
1	ZBQ-P-01-6-2		60	
2	ZBQ-P-01-10-2	200	100	
3	ZBQ-P-01-15-2		150	
4	ZBQ-P-01-6-3		60	
5	ZBQ-P-01-10-3	300	100	高度h为60时, 100
6	ZBQ-P-01-15-3		150	时, 两端各6只连接
7	ZBQ-P-01-6-4		60	孔。
8	ZBQ-P-01-10-4	400	100	
9	ZBQ-P-01-15-4		150	
10	ZBQ-P-01-6-5		60	
11	ZBQ-P-01-10-5	500	100	高度h为150时, 两
12	ZBQ-P-01-15-5		150	端各12只连接孔。
13	ZBQ-P-01-6-6		60	
14	ZBQ-P-01-10-6	600	100	
15	ZBQ-P-01-15-6		150	

阻燃桥架连接方式

Connection of fire retarding supports


插接式

Socket type connection



直接式


Direct connection





阻燃槽式水平弯通 XQJ-ZBQ-C-02A


Fire retarding channel type horizontal bend



No.	Model	Size	Length	Thickness
序号	型 号	规 格 A × B	长 度 L	厚 度 mm
1	C-02A-1	50 × 25	200	2
2	C-02A-2	100 × 50	250	2.5
3	C-02A-3	150 × 75	325	3.3
4	C-02A-4	200 × 100	400	3.5
5	C-02A-5	250 × 125	475	3.5
6	C-02A-6	300 × 150	550	4.5
7	C-02A-7	400 × 200	700	4.5
8	C-02A-8	500 × 200	800	5.5
9	C-02A-9	600 × 200	900	6.5
10	C-02A-10	800 × 200	1100	7.5

阻燃槽式水平三通 XQJ-ZBQ-C-03A


Fire retarding channel type horizontal bend



No.	Model	Size	Length	
序号	型 号	规 格 A × B	长 度	
			L ₁	L ₂
1	C-03A-1	50 × 25	350	200
2	C-03A-2	100 × 50	400	250
3	C-03A-3	150 × 75	500	325
4	C-03A-4	200 × 100	600	400
5	C-03A-5	250 × 125	700	475
6	C-03A-6	300 × 150	800	550
7	C-03A-7	400 × 200	1000	700
8	C-03A-8	500 × 200	1100	800
9	C-03A-9	600 × 200	1200	900
10	C-03A-10	800 × 200	1400	1000

阻燃槽式水平四通 XQJ-ZBQ-C-04A

Fire retarding channel type horizontal Cross




No.	Model	Size	Length
序号	型 号	规 格 A × B	长 度 mm
1	C-04A-1	50 × 25	350
2	C-04A-2	100 × 50	400
3	C-04A-3	150 × 75	500
4	C-04A-4	200 × 100	600
5	C-04A-5	250 × 125	700
6	C-04A-6	300 × 150	800
7	C-04A-7	400 × 200	1000
8	C-04A-8	500 × 200	1100
9	C-04A-9	600 × 200	1200
10	C-04A-10	800 × 200	1400

ZQC-XV 电缆竖井


电缆竖井适用于各种井道垂直引上、引下电缆敷设装置。

Cable shafts are suitable for vertical cable laying in various shafts

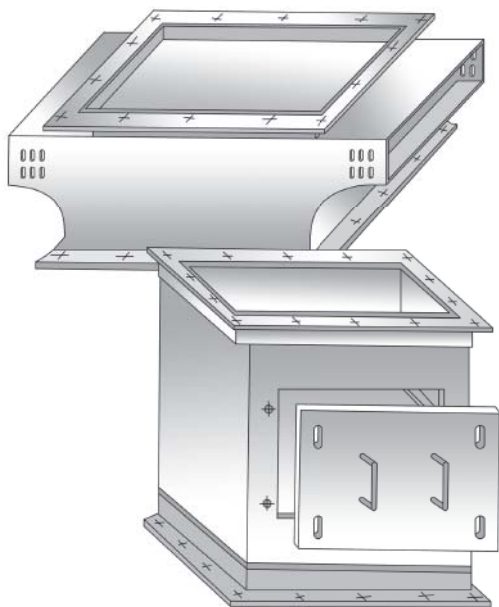




电缆竖井
Cable shaft



Model	Width	Weigh		
型 号	宽度	a	d × c	重量kg
XV-4 × 3	400	300	600 × 240	51.63
XV-4 × 6		600		72.42
XV-5 × 3	500	300	600 × 340	59.38
XV-5 × 6		600		78.64
XV-6 × 3	600	300	600 × 440	65.51
XV-6 × 6		600		86.50
XV-8 × 3	800	300	600 × 600	89.72
XV-8 × 6		600		112.65
XV-10 × 3	1000	300	600 × 800	105.90
XV-10 × 6		600		128.63
XV-12 × 3	1200	300	600 × 1000	121.52
XV-12 × 6		600		144.36


竖井盖板

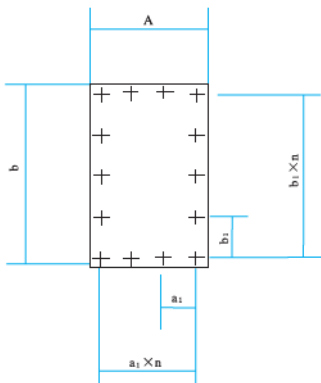

Model	Width	Weigh			
型号	宽度	a	b × n	重量kg	wkg
CXV-4 × 3	500	400	110 × 4	85 × 4	4.4
CXV-4 × 6		700		128 × 5	7.9
CXV-5 × 3	600	400	135 × 4	85 × 4	5.3
CXV-5 × 6		700		128 × 5	9.5
CXV-6 × 3	700	400	128 × 5	85 × 4	6.2
CXV-6 × 6		700		128 × 5	11.1
CXV-8 × 3	900	400	142 × 6	88 × 4	8.7
CXV-8 × 6		700		130 × 5	15.1
CXV-10 × 3	1100	400	105 × 10	88 × 4	10.6
CXV-10 × 6		700		130 × 5	18.4
CXV-12 × 3	1300	400	125 × 10	88 × 4	12.5
CXV-12 × 6		700		130 × 5	21.7

竖井接头(双侧)

Shaft connection (double sided)

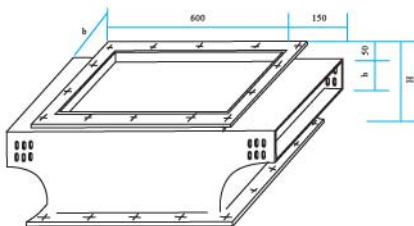


Model	Height	Width	Height	Weight
型号	高度(mm)	宽度(mm)	高度(mm)	重量kg
XV-T2-4 × 6 × 6	100	400	300	32.14
XV-T2-5 × 6 × 6		500		35.48
XV-T2-6 × 6 × 6		600		38.85
XV-T2-8 × 6 × 6		800		54.81
XV-T2-4 × 6 × 10	150	400	350	34.94
XV-T2-5 × 6 × 10		500		39.20
XV-T2-6 × 6 × 10		600		42.52
XV-T2-8 × 6 × 10		800		59.28
XV-T2-10 × 6 × 10	200	1000	400	68.21
XV-T2-4 × 6 × 15		400		43.41
XV-T2-5 × 6 × 15		500		46.62
XV-T2-6 × 6 × 15		600		49.92
XV-T2-8 × 6 × 15		800		65.75
XV-T2-10 × 6 × 15		1000		73.74
XV-T2-12 × 6 × 15		1200		82.48

注：法兰螺孔见同型号竖井盖板

Note: For flange bolt holes see shaft cover with the same size.

竖井接头(单侧)

Shaft connection (single sided)

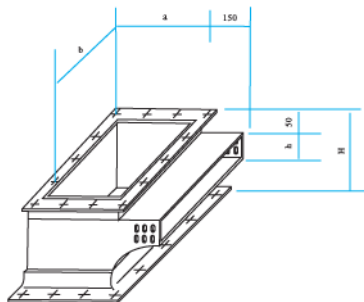

Model	h	H	b	a	重量kg	Weight
型号	h	H	b	a	重量kg	Weight
XV-T1-4 × □ × 6	100	300	400	300/600	21.77	29.37
XV-T1-5 × □ × 6			500		24.80	32.30
XV-T1-6 × □ × 6			600		27.71	35.26
XV-T1-8 × □ × 6			800		41.01	50.37
XV-T1-4 × □ × 10	150	350	400	300/600	25.68	33.28
XV-T1-5 × □ × 10			500		26.66	36.17
XV-T1-6 × □ × 10			600		31.54	38.87
XV-T1-8 × □ × 10			800		44.76	54.12
XV-T1-10 × □ × 10	200	400	1000	300/600	51.86	61.30
XV-T1-4 × □ × 15			400		27.38	36.12
XV-T1-5 × □ × 15			500		30.49	38.80
XV-T1-6 × □ × 15			600		33.51	41.85
XV-T1-8 × □ × 15			800		47.00	57.15
XV-T1-10 × □ × 15			1000		54.34	64.63
XV-T1-12 × □ × 15			1200		61.71	71.86

注：1、法兰螺孔见同型号竖井盖板

Note: For flange bolt holes see shaft cover with the same size.

2、□-订货时按需要a填填写3或6，3或6为a=300、600的百分之一表示。


3、W、W1分别为a=300、600的重量。

例：XV-T1-4 × □ × 6 订货填写型号有：XV-T1-4-4 × 3 × 6
XV-T1-4-4 × 6 × 6




竖井安装示意图

Schematic diagram of mounting for shafts

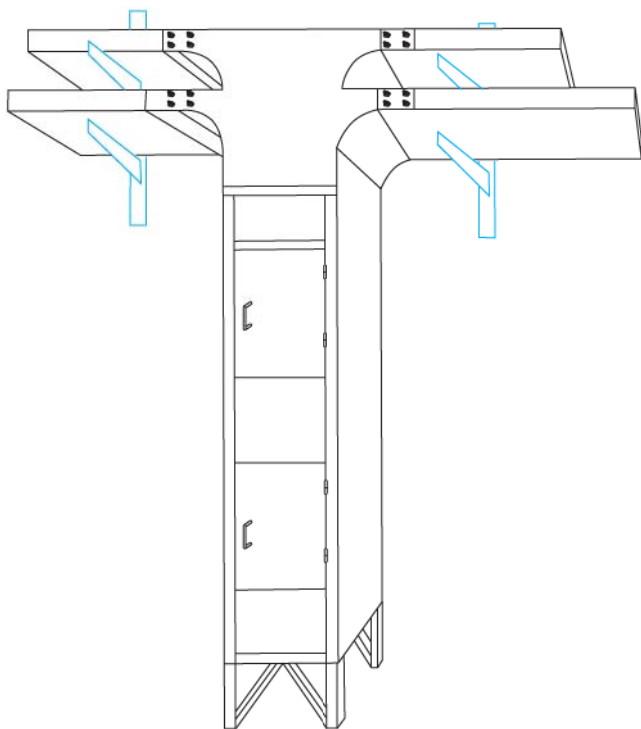

电缆竖井安装示意图

Schematic diagram of mounting for shafts

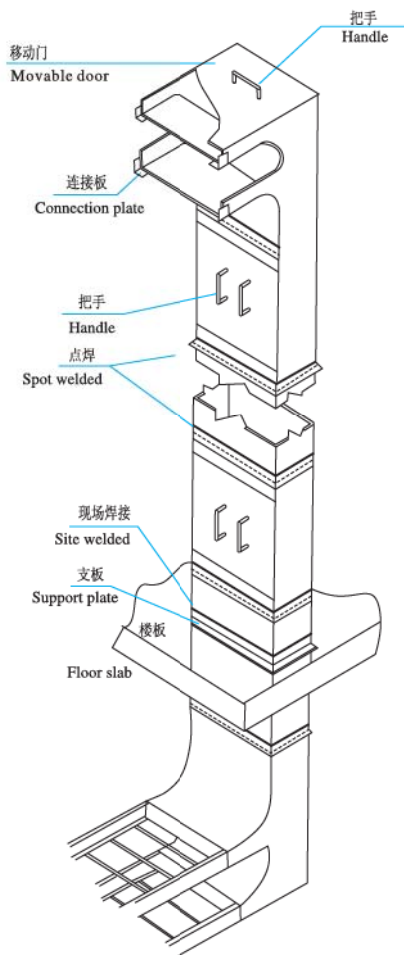



支 架

XQJ-H.TB

支架是支撑电缆桥架和电缆的主要部件，它由立柱、立柱底座、托臂等组成。我厂生产的支架是根据日本、西德的同类产品设计而成；它具有结构简单、重量轻、成本低、强度大、造型美等优点，可满足不同环境条件（工艺管道架上、楼板上、墙壁上、电缆沟内）安装成不同形式（悬吊式、直立式、侧壁式、单边、双边和多层等）的需要。

电缆桥架如需多层重载吊装时，要尽量采取双边敷设、避免偏载过大。

支架部分的连接螺栓配套供货、安装螺栓（膨胀螺栓）根据需要按型号订货。

支架部分其表面处理有电镀锌、热镀锌、喷漆、喷塑四种。

用户如需其它品种规格的支架、欢迎来图、来函或面洽订货。

Support

XQJ-H.TB


The support, which is made up of stand, stand base and bracket arm, is the main part to support the cables. The support produced in our factory is designed to the same kind of product in both Japan and Germany. It has such advantages as simple structure, Light weight, Low cost, big strength and wonderful modelling. It can meet different environmental conditions (such as, on the technological piping frame, on the floors, on the walls and cable ditches) to be installed in different forms (such as, hanging style, standing style, side style, single, double and multilateral styles).

When hoisted with multilateral heavy Load, the cables should be Laid bilaterally to avoid being over Loaded.

Connecting bolts of the support can be provided together. If necessary, installation bolts can be ordered according to the type. The surface dealing of the support has 4 kinds of ways.


electroplating, zinc-plating, paint spraying and plastics spraying. If you need other varieflies of support, you can order by sending your pictures, writing to us and coming to have a face-to-face talk with us.

XQJ-H-01A工字钢立柱 I-Steel Post




序号 No.	型号 Model	规格L Specification	重量kg/件 Weight kg/pc	备注 Remark
1	H-01A-3	300	4.07	□ 型每件加重1.61kg additional 1.61kg per piece for Type □
2	H-01A-5	500	6.78	
3	H-01A-8	800	10.85	
4	H-01A-10	1000	13.53	
5	H-01A-15	1500	20.35	
6	H-01A-20	2000	27.06	□ 型每件加重4.8kg additional 4.8kg per piece for Type □
7	H-01A-25	2500	33.88	
8	H-01A-30	3000	40.7	

XQJ-H-01B丁字钢立柱 T-Steel Post Type Post




序号 No.	型号 Model	规格L Specification	重量kg/件 Weight kg/pc	备注 Remark
1	H-01B-3	300	3.24	□ 型每件加重1.61kg additional 1.61kg per piece for Type □
2	H-01B-5	500	5.42	
3	H-01B-8	800	8.65	
4	H-01B-10	1000	10.81	
5	H-01B-15	1500	16.22	
6	H-01B-20	2000	21.61	

XQJ-H-01C槽钢立柱 Trough-Steel Post



序号 No.	型号 Model	规格L Specification	重量kg/件 Weight kg/pc	备注 Remark
1	H-01C-3	300	3.63	□ 型每件加重1.61kg additional 1.61kg per piece for Type □
2	H-01C-5	500	6.05	
3	H-01C-8	800	9.68	
4	H-01C-10	1000	12.1	
5	H-01C-15	1500	18.15	
6	H-01C-20	2000	24.2	


XQJ-H-01D角钢立柱 Angle-Steel Post



序号 No.	型号 Model	规格L Specification	重量kg/件 Weight kg/pc	备注 Remark
1	H-01D-3	300	1.62	□ 型每件加重1.61kg additional 1.61kg per piece for Type □
2	H-01D-5	500	2.71	
3	H-01D-8	800	4.33	
4	H-01D-10	1000	5.40	
5	H-01D-15	1500	8.11	
6	H-01D-20	2000	10.80	




XQJ-H-02A工字钢立柱底座
I-Steel Post Base

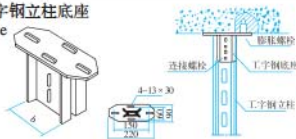


型号 Type	b (mm)	kg / 件 Unit price	备注 Remark
H-02A-8#	70	4.2	配8#工字钢fitting with 8# I-Steel
H-02A-10#	90	4.5	配10#工字钢fitting with 10# I-Steel

XQJ-H-02C槽钢立柱底座
Trough-Steel Post Base




型号 Type	b (mm)	kg / 件 Unit price	备注 Remark
H-02C-8#	70	2.5	配8#C型槽钢fitting with 8# C-uptight post
H-02C-10#	90	2.8	配10#C型槽钢fitting with 10# C-uptight post

XQJ-H-02D角钢立柱底座
Angle-Steel Post Base

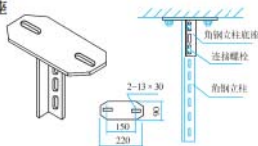


H-02D角钢立柱底座 每件单重2.9kg
H-02D angle iron post foundation is linked Weight 2.9kg

XQJ-H-03A工字钢倾斜底座
I-Steel Tilt




型号 Model	b (mm)	kg / 件 Unit price	备注 Remark
H-03A-8#	70	6.1	配8#工字钢fitting with 8# Steel post
H-03A-10#	90	6.3	配10#工字钢fitting with 10# Steel post

XQJ-H-03C槽钢倾斜底座
Trough-Steel Tilt Base

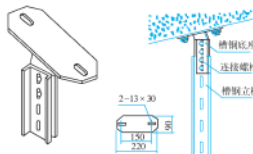

H-03C型钢倾斜底座 每件单重6.2kg。
H-03C channl iron indined foundation can be linked weight 6.2kg.


XQJ-H-03D角钢倾斜底座
Angle-Steel Tilt Base



型号 Model	b (mm)	kg / 件 Unit price	备注 Remark
H-01D	40	5.4	H-01D, H-01B立柱fitting H-01D, H-01B

电缆桥架在电缆沟内安装 (一)

Installation of Cable Tray Inside Cable Channel




型号 Model	名称 Name
DZJ	电缆支架 Cable shelf
YLS	予埋螺栓 Anchor bolt

电缆支架间距:
电力电缆: 1000mm
控制电缆: 800mm
n为悬臂个数

型号 Model	n个	a(mm)	b(mm)	h(mm)	重量 Weight(kg)
DZJ-22	2	210	310	390	3.82
-23		210	310		4.65
-24		410	310		8.08
-25		510	310		9.27
-26		610	310		10.65
DZJ-32	3	210	310	570	8.06
-33		210	310		10.01
-34		410	310		17.96
-35		510	310		19.92
-36		610	310		21.87
DZJ-42	4	210	310	810	11.02
-43		210	310		13.63
-44		410	310		26.28
-45		510	310		28.81
-46		610	310		31.36
DZJ-52	5	210	310	990	14.26
-53		210	310		16.95
-54		410	310		29.37
-55		510	310		31.84
-56		610	310		34.31

电缆支架在电缆隧道内安装 (一)

Installation of Cable Inside Cable Channel




型号 Model	名称 Name
DZJ	电缆支架 Cable shelf
PLS	膨胀螺栓 expansion bolt

电缆支架间距为:
电力电缆: 1000mm
控制电缆: 800mm
层间距a可按用户要求
供货。

型号 Model	n个	a(mm)	b(mm)	d(mm)	c(mm)	h(mm)	重量 Weight(kg)
DZJ-62	6	210	310	385	56 (≤56×5)	1230	16.61
-63		210	310				20.50
-64		410	310				24.40
-65		510	310				28.29
-66		610	310				32.12
DZJ-72	7	210	310	625	63 (≤63×6)	1470	22.67
-73		210	310				27.21
-74		410	310				31.76
-75		510	310				36.30
-76		610	310				40.77
DZJ-82	8	210	310	625	40 (≤40×3)	1710	28.14
-83		210	310				31.33
-84		410	310				36.52
-85		510	310				41.71
-86		610	310				46.82
DZJ-92	9	210	310	865	40 (□63)	1890	29.15
-93		210	310				34.99
-94		410	310				40.63
-95		510	310				46.67
-96		610	310				52.42

电缆支架在电缆沟内安装 (二)

Installation of Cable Shelf Inside Cable Channel




型号 Model	名称 Name
DZJ	电缆支架 Cable shelf
YLS	予埋螺栓 Anchor bolt
TLS	梯架 Ladder frame

电缆支架间距为3000mm。
支架层间距a可按用户要求
供货。

型号 Model	n个	a(mm)	b(mm)	h(mm)	重量 Weight(kg)
DZJ-22	2	210	310	430	3.72
-23		210	310		7.19
-24		410	310		8.42
-25		510	310		9.70
-26		610	310		10.98
DZJ-32	3	210	310	660	8.53
-33		210	310		10.49
-34		410	310		12.44
-35		510	310		14.44
-36		610	310		16.30
DZJ-42	4	210	310	940	11.73
-43		210	310		14.32
-44		410	310		16.92
-45		510	310		19.45
-46		610	310		22.07
DZJ-52	5	210	310	1170	15.22
-53		210	310		17.92
-54		410	310		20.46
-55		510	310		24.41
-56		610	310		27.60

电缆支架在电缆隧道内安装 (二)


Installation of Cable Shelf Inside Cable Channel



型号 Model	名称 Name
DZJ	电缆支架 Cable shelf
PLS	膨胀螺栓 expansion bolt

电缆支架间距为3000mm。
支架层间距a可按用户要求
供货。


型号 Model	n个	a(mm)	b(mm)	d(mm)	c(mm)	h(mm)	重量 Weight(kg)
DZJ-62	6	210	310	470	56 (□56×5)	1450	17.80
-63		210	310				21.69
-64		410	310				25.59
-65		510	310				29.48
-66		610	310				33.31
DZJ-72	7	210	310	750	63 (□63×6)	1730	24.63
-73		210	310				29.17
-74		410	310				33.72
-75		510	310				38.26
-76		610	310				42.72
DZJ-82	8	210	310	750	40 (□63)	2010	28.39
-83		210	310				33.58
-84		410	310				38.78
-85		510	310				43.97
-86		610	310				49.70
DZJ-92	9	210	310	750	40 (□63)	2240	31.78
-93		210	310				37.62
-94		410	310				43.46
-95		510	310				49.30
-96		610	310				55.04




序号 No.	型号 Model	规格 Specification	重量/kg/件 Weight kg/pc	备注 Remark
1	TB-01A-150	170	1.63	螺栓、压板配套供给, 按件计价10.73元 Remarks bolts and fastener available 10.73 Chinese yuan/pc
2	TB-01A-200	220	1.94	
3	TB-01A-300	320	2.59	
4	TB-01A-400	420	3.23	
5	TB-01A-500	520	3.88	
6	TB-01A-600	620	4.53	
7	TB-01A-800	820	5.83	




工字钢立柱
H-01A
托臂
TB-01A




序号 No.	型号 Model	规格 Specification	重量/kg/件 Weight kg/pc	备注 Remark
1	TB-01B-150	170	1.60	连接螺栓M12 Linked to bolt M12
2	TB-01B-200	220	1.87	
3	TB-01B-300	320	2.56	
4	TB-01B-400	420	3.21	
5	TB-01B-500	520	3.85	
6	TB-01B-600	620	4.51	
7	TB-01B-800	820	5.81	




托臂
TB-01B
膨胀螺栓
IS-06




序号 No.	型号 Model	规格 Specification	重量/kg/件 Weight kg/pc	备注 Remark
1	TB-02-150	170	1.41	连接螺栓 IS-05 M12 x 35 Linked to bolts IS-05 M12 x 35
2	TB-02-200	220	1.74	
3	TB-02-300	320	2.38	
4	TB-02-400	420	3.03	
5	TB-02-500	520	3.67	
6	TB-02-600	620	4.31	
7	TB-02-800	820	5.62	




异形立柱
H-01E
托臂
TB-02
连接螺栓
IS-05




序号 No.	型号 Model	规格 Specification	重量/kg/件 Weight kg/pc	备注 Remark
1	TB-03-100	120	1.01	连接螺栓 IS-03 M12 x 25 Linked to bolts IS-03 M12 x 25
2	TB-03-150	170	1.34	
3	TB-03-200	220	1.66	
4	TB-03-300	320	2.31	
5	TB-03-400	420	2.96	
6	TB-03-500	520	3.61	
7	TB-03-600	620	4.25	
8	TB-03-800	820	5.56	



角钢立柱
H-01D
连接螺栓
IS-03M10 x 25
托臂
TB-03




序号 No.	型号 Model	规格 Specification	重量/kg/件 Weight kg/pc	备注 Remark
1	TB-04-150	170	0.97	连接螺栓 IS-06/12 M12 x 110 Fix to bolt IS-06/12 M12 x 110
2	TB-04-200	220	1.12	
3	TB-04-300	320	1.43	
4	TB-04-400	420	1.74	
5	TB-04-500	520	2.03	
6	TB-04-600	620	3.16	
7	TB-04-800	820	3.97	



固定立柱
TB-04
连接螺栓
IS-03M10 x 25
固定
TB-04
膨胀螺栓
IS-06




悬吊安装 Hoisting-Type Installation of Tray




型号 Model	名称 Name	页次 Page
IS	膨胀螺栓 Expansion Bolt	
TPC-08	护罩 Cover	
C-01A	桥架 Cable Tray	
TB-05A	吊杆 Sling Stay	
TB-05B	横梁 Beam	

TB-05B型横梁 TB-05B crossbeam



型号 Model	b(mm)	a(mm)	重量kg/件 Wt kg/pc
TB-05B-7	700	L63 × 6	4.00
-10	1000		5.72
-16	1600		13.27
-21	2100	L80 × 8	17.42


TB-05A型吊杆 TB-05A Hoisting pole




型号 Model	H	重量kg/件 Wt kg/pc
TB-05A-5	500	2.32
-10	1000	2.75
-16	1500	3.17
-21	2000	3.60

XQJ-ZYS型引上装置 Hold Up Guides

件号	名称	型号	备注
1	垫片	XQJ-DP50	
2	工字钢	XQJ-H-01A	
3	电缆卡子	XQJ-K-08A	
4	横梁	XQJ-HL	
5	固定板	XQJ-GDB3	
6	支架	XQJ-ZJ2	
7	槽形夹板	XQJ-QJB	
8	工字钢立柱底座	XQJ-H-02A	




QJB型槽形夹板 QJB pincerlike tong board



L长度根据需求供货


型号 Model	a	L	工字钢#	重量 kg	重量 kg
QJB5-5	55	500	8#	3.09	M10 × 24
QJB5-10	55	1000	10#	5.28	M10 × 24
QJB6-5	68	500	8#	3.3	M10 × 40
QJB6-10	68	1000	10#	5.72	M10 × 40

DP型垫片 DP spacer




单重: 0.16kg
piece weight

GDB3型固定板 GDB3 fixing board



单重: 0.15kg
piece weight

HL横梁 HL cuoss beam




型号 Type	HL-5	HL-9	HL-12	HL-15
L	500	900	1200	1500
单重kg Weight	2.60	5.10	6.30	7.20




电缆导轨

Cable Slide Model




型号 Model	b(mm)	单价元/件 unit price(¥)
TPC-17-10	90	4.75
TPC-17-20	190	9.63
TPC-17-30	290	11.15
TPC-17-40	390	14.38
TPC-17-50	490	15.58
TPC-17-60	530	20.43

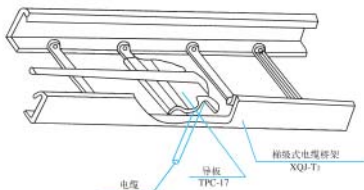

电梯从梯架上引时，梯架要损伤电缆外皮，安装此板后，可达到保护电缆之目的。
The cable slide can protect from being damaged

引下装置 Down-Leading Device

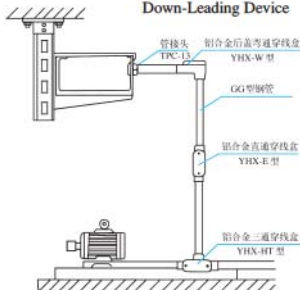

XQJ MY-1型 (A)




GG-60型钢管 Steel Pipe Model GG-60

型号 Model	φmm	单价kg Weight (kg)
GG-60	60	24.51

引下装置

Down-Leading Device

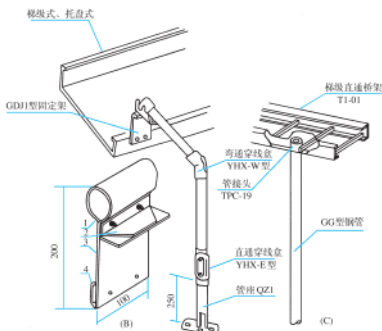

GDJ型固定架
Fastener Model GDJ:
2-转动角铁
running angel-bar
3-支撑板
supporter
4-槽型压板XQJ-MY-Ⅱ型
channel type platen Model XQJ-MY-Ⅱ

注：引下线安装可采用铝合金穿线盒，作连接钢管，穿线盒有直通、三通、左弯、右弯、后盖弯四通等。结构形式，使用穿线盒，安装方便、外形美观、是必不可缺少的配件，详细安装、见本厂的穿线盒说明书。

Note: Alluminium alloy threading box, functioning as connection steel pipe, may be used in the installation of conduits. The threading box, an integral spare part, falls into following categories: straight, T-joint, left joint, right joint back joint and cross. The use of threading box makes easy installation, beautiful appearance, ect, please refer to the Instruction on Threading Box for its installation.



附 件

本部分主要是XQJ系列电缆桥架的通用配件，它包括调宽片、调高片、隔板等。这是电缆桥架安装中的变宽、变高、连接、水平和垂直走向中的小角度调整动力电缆与控制电缆的分隔等必需的附件。

Accessories

This part mainly contains common fittings of XQJ series of cables, including width-adjusting plate, height-adjusting plate and separation board, this is the small-angle adjusting plate, connection plate, angle-adjustment in the changing of width and height, connection, horizontal and vertical tread in the installation of cables, and also the necessary accessories for the separation between power cable and control cables.

固定件 配件

这一部分主要包括各种电缆、电缆卡子和连接、紧固螺栓等一些电缆桥架安装中所需的通用附件，供用户在订货，安装时选用。

附件部分中所有连接、紧固螺栓、电缆卡子全部镀锌，其它槽板，花盘角铁表面处理分有静电喷塑、镀锌、喷漆三种。

Fixed piece Fittings

The part mainly includes common accessories, such as all kinds of cables, Piping cable clips and connecting and fastening bolts needed in the cable installation.


All connecting, fastening bolts and cable clips in the accessories are zinc-plated. The surface dealing of the other channel board and faceplate angle iron is dealt with electrostatic plastics spraying, zinc-plating and paint spraying.

XQJ-TPC-01A调宽片
Width-Adjusting Flake




序号 No.	型号 Model	配置高度 H Height	b	L	单价/件 Unit price (元)	备注 Remark
1	TPC-01A-6-1	60	50	100	9.80	高度b为60, 100时每端3只连接孔 3 holes in either end of width modulator with a height of 60mm and 100mm
2	TPC-01A-6-2			200	10.50	
3	TPC-01A-6-3			300	11.80	
4	TPC-01A-6-4			400	12.70	
5	TPC-01A-10-1	100	90	100	13.70	高度b为150的, 每端12只连接孔 12 holes in either end of width modulator with a height of 150mm
6	TPC-01A-10-2			200	18.20	
7	TPC-01A-10-3			300	21.20	
8	TPC-01A-10-4			400	23.40	
9	TPC-01A-15-1	150	140	100	24.10	
10	TPC-01A-15-2			200	30.50	
11	TPC-01A-15-3			300	33.90	
12	TPC-01A-15-4			400	37.30	

安装图例




XQJ-TPC-01B调高片
Height-Adjusting Flake




序号 No.	型号 Model	L1	L2	L	单价/件 Unit price (元)	备注 Remark
1	TPC-01B-60/100	50	90	205	10.60	高度60调100 From 60mm to 100mm
2	TPC-01B-60/150	50	140	205	15.10	高度60调150 From 60mm to 150mm
3	TPC-01B-100/150	90	140	205	17.10	高度100调150 From 100mm to 150mm
4	TPC-01B-150/200	140	190	385	25.30	高度150调200 From 150mm to 200mm

安装图例




XQJ-TPC-02直接片
Straight Connecting Flake




序号 No.	型号 Model	配置高度 H Height	b	h	L	单价/件 Unit price (元)	备注 Remark
1	TPC-02a-50	50, 60	35	32		9.80	桥架高度125mm以下的直接片为6只连接孔。 6 holes in connectors when cable tray is below 125mm high.
2	TPC-02b-50					9.50	
3	TPC-02a-75	75	50	47		10.60	
4	TPC-02b-75					10.20	
5	TPC-02a-100	100	75	71	205	13.80	桥架高度150mm以下的直接片为12只连接孔。 12 holes in connectors when cable tray is below 150mm high.
6	TPC-02b-100					13.50	
7	TPC-02a-125	125	100	96		16.50	
8	TPC-02b-125					16.20	
9	TPC-02a-150	150	125	120		19.50	桥架高度150mm以下的直接片为12只连接孔。 12 holes in connectors when cable tray is below 150mm high.
10	TPC-02b-150					18.50	
11	TPC-02a-200	200	175	170	205	28.50	
12	TPC-02b-200					27.00	
13	TPC-02c-60	60			30	10.60	桥架高度100mm以下的直接片为6只连接孔。 6 holes in connectors when cable tray is below 100mm high.
14	TPC-02d-60					10.20	
15	TPC-02c-100	100			35	13.80	
16	TPC-02d-100					13.50	
17	TPC-02c-150	150			205	19.50	桥架高度150mm以下的直接片为12只连接孔。 12 holes in connectors when cable tray is below 150mm high.
18	TPC-02d-150					18.50	
19	TPC-02c-200	200			130	28.50	
20	TPC-02d-200					27.00	

安装图例




XQJ-TPC-03弯接片
Curved Connecting Flake




序号 No.	型 号 Model	配置高度 H Height	b	L	单价/元件 Unit price (\$)	备 注 Remark
1	TPC-03-50	50、60	35	300	10.10	
2	TPC-03-75	75	50		12.20	
3	TPC-03-100	100	75		17.90	
4	TPC-03-125	125	100	20.90		
5	TPC-03-150	150	125	600	31.60	
6	TPC-03-200	200	175		36.10	

安装图例



XQJ-TPC-04调角片
Angle-Adjusting Flake





序号 No.	型号 Model	配置高度 H Height	b	L	单价/件 Unit price (元)	备注 Remark
1	TPC-04-60	60	50	260	9.00	与梯级式、托盘式、槽式小 号连接孔配置 used with ladder type, tray type and channel type cable tray with small holes
2	TPC-04-100	100	90	300	15.60	与梯级式、托盘式、槽式大 号连接孔配置 used with ladder type and channel type cable tray with large holes
3	TPC-04-150	150	140	350	20.90	

安装图例




XQJ-TPC-05 固定压板

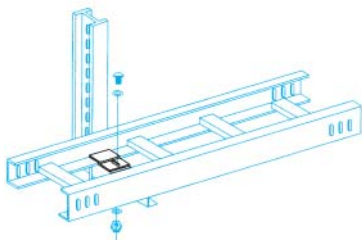

TPC-05固定压板，主要用于梯级式桥架与托臂压固及梯级式桥架垂直安装时与墙壁固定TPC-05 fixing pressed board is mainly used in the fixing of Stair-type bridge frame with braced arm and the fixing of stair-type bridge frame with wall when installed vertically



XQJ-TPC-07 隔板



h₁用于梯级式桥架
h₂用于托盘式和槽式桥架


型号 Model	配置 高度	h ₁ mm	h ₂ mm	重量 kg	
				h ₁	h ₂
TPC-07-50	50, 60	35	40	2.78	3.60
TPC-07-75	75		65		4.87
TPC-07-100	100	75	90	4.49	6.17
TPC-07-125	125		115		7.16
TPC-07-150	150	125	140	8.29	10.92
TPC-07-200	200		190		14.69

XQJ-TPC-13 管接头




序号 No.	型号 Model	配置尺寸 G size of pipe	M	d	s	单价元 / 件 unit price(s)
1	TPC-13-1/2"	1/2"	M22 × 1.5	18	27	6.20
2	TPC-13-3/4"	3/4"	M27 × 1.5	22	32	6.60
3	TPC-13-1"	1"	M33 × 1.5	28	41	12.30
4	TPC-13-1 1/2"	1 1/2"	M48 × 2	38	55	24.50
5	TPC-13-2"	2"	M56 × 2	48	65	32.90

IS-01方颈连接螺栓
Aqare neck connecting bolt




型号 Model	M	备注 Remark
IS-01-6	M6	L=12
IS-01-8	M8	L=16, L=20, L=25
IS-01-10	M10	L=20

IS-02半圆连接螺栓
Semicircle



型号 Model	M × L	备注 Remark
IS-02-5	M5 × 22	L=12
IS-02-6	M6 × 22	
IS-02-8	M8 × 22	

IS-03六角连接螺栓
Hexgon connecting bolt




型号 Model	M × L	备注 Remark
IS-03-8	M8 × 22	
IS-03-10	M10 × 25	
IS-03-12	M12 × 30	

IS-04T型螺栓
T bolt




型号 Model	M × L	备注 Remark
IS-04-8	M8 × 30	
IS-04-10	M10 × 35	

IS-05T型螺栓
T bolt



型号 Model	M × L	备注 Remark
IS-05-8	M8	
IS-05-10	M10	

IS-06膨胀螺栓
Expanding bolt



型号 Model	M × L	允许拉力 Permitted pull force
IS-06-6	M6 × 65, 80	200号混凝土 doncrete 350 500 720 100
IS-06-8	M8 × 80, 100	
IS-06-10	M10 × 95, 110	
IS-06-10	M10 × 125	
IS-06-12	M12 × 110	
IS-06-12	M12 × 130	
IS-06-12	M12 × 150	

FJ-01吊板
Hoisting board



FJ-02吊夹
Hoisting tongs



FJ-03吊框
Hoisting frame



用于50 × 50、100 × 50配线槽吊装
Fits to 50 × 50, 100 × 50 weirfittings trough

FJ-07^a槽板
Trough board




注：括号内值为a型
括号外值为b型

用于电缆卡座和仪表基座
Fits to the fundation of cable and in strument

型号 Model	L(mm)	备注 Remark
FJ-07 ^a _b -200	200	
FJ-07 ^a _b -400	400	
FJ-07 ^a _b -600	600	
FJ-07 ^a _b -800	800	
FJ-07 ^a _b -1000	1000	

FJ-08异型槽板
Special-d-shaped trough board




用于电卡座和仪表基座
Fits to the fundation of cable and in strument

型号 Model	L(mm)	备注 Remark
FJ-08-200	200	
FJ-08-400	600	
FJ-08-600	1000	
FJ-08-800	1500	
FJ-08-1000	2000	



FJ-09花盘角铁
Faceplate ange iron



用于电缆卡座和仪表底座

Fits to the fundation of cable and in strument

型号 Model	L(mm)	备注 Remark
FJ-09-200	200	
FJ-09-600	600	
FJ-09-1000	1000	
FJ-09-1500	1500	
FJ-09-2000	2000	

K-01单面电缆卡
Single face cable tong



按螺栓M5×22配套供货

Connecting bolt M5×22 provided in complete sets

型号 Model	D	配用电缆 Concerted Cable
FJ-01-13	13	φ10-φ13
FJ-01-17	17	φ14-φ17
FJ-01-21	21	φ14-φ17
FJ-01-25	25	φ26-φ29
FJ-01-29	29	φ26-φ29

K-02双边单根电缆卡
Doudie-side single preece cable tong




按螺栓M5×22配套供货

Connecting bolt M5×22 provided in complete sets

型号 Model	D	配用电缆 Concerted Cable
FJ-01-13	13	φ10-φ13
FJ-01-17	17	φ14-φ17
FJ-01-21	21	φ14-φ17
FJ-01-25	25	φ26-φ29
FJ-01-29	29	φ26-φ29

K-03双根电缆卡
Do ude piece cable tong




按螺栓M5×22配套供货

Connecting bolt M5×22 provided in complete sets


型号 Model	D	配用电缆 Concerted Cable
K-03-13	13	φ10-φ13
K-03-17	17	φ14-φ17
K-03-21	21	φ14-φ17
K-03-25	25	φ26-φ29
K-03-29	29	φ26-φ29

K-04管缆卡
Qipe cable tong



型号 Model	#	备注 Remark
K-04-08	8	
K-04-10	10	
K-04-12	12	在少量管缆敷 设计作定位用
K-04-14	14	It fits to fix position in the
K-04-16	16	layment of a few
K-04-18	18	piece cable
K-04-20	20	
K-04-22	22	

K-04管缆卡
Mutipeces cable tong




型号 Model	b×h	备注 Remark
K-05-50	50×50	用于电缆直径小 数多的固定
K-05-47	97×47	Used in thfaung of small diameter
K-05-87	97×87	qipe cable

K-06电缆卡带
Cable tong belt



型号 Model	规格 Standard	备注 Remark
K-06-120	120×9	
K-06-160	160×9	
K-06-260	260×9	

K-07电缆卡子
Cable tong



配FJ-07a 槽板

Cooperating with FJ-07a trough board

型号 Model	规格 Standard	配用电缆 Distribution Cable	备注 Remark
K-07-30	30×50	φ15-30	
K-07-50	50×75	φ30-50	
K-07-75	75×100	φ50-75	

K-08电缆卡子
Cable tong



配FJ-08 异形槽板FJ-09 faceoblite

Cooperating with angleiron

FJ-08 diameter varied trough board

配FJ-09 花盘角铁

cooperating with

型号 Model	规格 Standard	配用电缆 Distribution Cable	备注 Remark
K-08-30	30×50	φ15-30	
K-08-50	50×75	φ30-50	
K-08-75	75×100	φ50-75	

推介至尊 奉献至诚

今天我们站在了一个新的起点上

我们致力于：为我们产品的使用者提供长效安全、品质优良的产品。



大秦集团
DAQINJITUAN

镇江市亚东通用电气有限公司

地址：镇江新区金港大道82号
电话：0511-89986189
传真：0511-89986166
邮编：212132
Http:// www.jsdaqin.com
E-mail:js-daqin@163.com

ZHENJIANG YADONG GENERAL ELECTRIC CO., LTD.

Add: NO.82, jingang Avenue, New Zone,
Zhen jiang, jiangsu, P.R. china
Tel: 0511-89986189
Fax: 0511-89986166
P.C: 212132
Http:// www.jsdaqin.com
E-mail:js-daqin@163.com